

QUALIFICATION TEST REPORT
FP-06-28
LARGE TRANSPORT TYPE JET
AIRCRAFT AERODYNAMIC TESTING
OF THE CANDIDATE TYPE I FLUID

ARCTICA DG
LOT # 55

Produced at Nizhnekamsk, Tatarstan, Russia

for

ARCTON LTD
P.O.box 1079, GO-11
423570, Nizhnekamsk, Tatarstan, Russia.

by

Arlene Beisswenger
Marc-Mario Tremblay

Anti-icing Materials International Laboratory (AMIL)
UNIVERSITÉ DU QUÉBEC À CHICOUTIMI (UQAC)
April 2006

QUALIFICATION

This report presents results of high speed ramp aerodynamic acceptance tests, using Boundary Layer Displacement Thickness (BLDT) values, performed on samples of the candidate Type I fluid **ARCTON LTD ARCTICA DG LOT # 55**, produced at **Nizhnekamsk, Tatarstan, Russia**, evaluated concentrated as received according to the latest revisions of the SAE AMS 1424G specification and AS 5900 standard. The tests were performed between 0°C and -35.7°C within a $\pm 2^\circ\text{C}$ range, using the flat plate set-up in the Luan Phan refrigerated wind tunnel at the Anti-icing Materials International Laboratory (AMIL) research laboratory. AMIL is independent of fluid manufacturers and was found qualified on September 11, 1997 (reconfirmed October 25, 2002) by the Performance Review Institute according to PRI document AC3001, “audit criteria for compliance to SAE AMS 1424 and AMS 1428”.

On the basis of the acceptance criteria, the candidate Type I fluid ARCTON LTD ARCTICA DG LOT # 55 qualifies according to AMS 1424G specification for use on large transport type jet aircraft in the following temperature ranges:

- **above -33.5°C in the case of the Fluids as received.**

This fluid is qualified from 2006 April 10, for a two year period.

This page left blank.

TABLE OF CONTENTS

QUALIFICATION	i
LIST OF TABLES	iv
LIST OF FIGURES	iv
LIST OF SYMBOLS.....	v
TEST RESULTS	1
TEST DESCRIPTION.....	19
1. INTRODUCTION.....	21
2. TEST DESCRIPTION.....	21
2.1 Flat Plate Elimination Test	21
2.2 Measurements	23
2.3 Calibration and Acceptance Criteria	23
3. TEST RESULTS	24
3.1 Test Presentation	24
3.2 Calculation of the Calibration and Acceptance Criteria.....	24
3.3 Flat Plate Elimination Tests.....	29
4. REFERENCES	29
ATTACHMENT 1.....	31
ATTACHMENT 2.....	35
ACCREDITATION.....	83

LIST OF TABLES

Table 1 - Fluid Identification.....	3
Table 2 - Surface Tension, pH and Refractive Index	3
Table 3 - Brookfield Viscosity (mPa·s).....	5
Table 4 - Aerodynamic Performance Test Data: Fluid as received	7
Table 5 - Refractive Index Data and Water Change: Fluid as received.....	15
Table 6 - Dry Test Data	25
Table 7 - Aerodynamic Performance Test Data : Reference Fluid	26
Table 8 - Refractive Index Data and Water Change: Reference Fluid.....	27

LIST OF FIGURES

Figure 1 - Aerodynamic Test Results	9
Figure 2 - Fluid Elimination	11
Figure 3 - Relative Humidity.....	13
Figure 4 - Refractive Index versus Water Content.....	17
Figure 5 - FPET Set-up.....	22
Figure 6 - Take-off Ground Acceleration Simulation	22
Figure 7 - Acceptance Criteria	28

LIST OF SYMBOLS

δ_{ave}^*	average Boundary Layer Displacement Thickness (BLDT) over the test section perimeter at cross-section 3 (Figure 5) evaluated by the equation 2 in Appendix B, Attachment 1, (mm)
δ^*	Boundary Layer Displacement Thickness (BLDT) over the test section perimeter at cross-section 3 (Figure 5) evaluated by the equation 3 in Appendix B, Attachment 1, (mm)
AIR	Aerospace Information Report
AMIL	Anti-icing Materials International Laboratory
AMS	Aerospace Material Specification
AS	Aerospace Standard
FE	Fluid Elimination during the test (%)
FP	Flat Plate elimination test identification number
FPC	Flat Plate Calibration test identification number
FPD	Flat Plate elimination test Dry (without fluid)
FPET	Flat Plate Elimination Test
P	Static Pressure as measured by gauges positioned at points # 1, 2 and 3 in the set-up (Figure 5) (mPa)
Rh	Relative humidity (%)
SAE	Society of Automotive Engineers
t	Thickness of the film fluid on the plate (μm)
T_a	Air Temperature as recorded at the top of the cross-section 2 in the set up (Figure 5) ($^{\circ}\text{C}$)
T_f	Fluid Temperature as recorded in the fluid film at the bottom of the cross-section 3 (Figure 5) ($^{\circ}\text{C}$)
UQAC	University of Quebec at Chicoutimi
V	Air Velocity derived from the measurement of the pressure difference $P_1 - P_2$ using the equation (1) in Appendix B, Attachment 1 (m/s)
WC	Water Change (% w/w)

This page left blank.

TEST RESULTS

This page left blank.

Table 1 - Fluid Identification

Company Name	Product	Color	Manufacture Location	Manuf. Date	AMIL Label	Recep. Date
ARCTON LTD	ARCTICA DG LOT # 55 NEAT	Colorless	Nizhnekamsk, Tatarstan, Russia	January 2006	G736	06-03-30
OCTAGON PROCESS INC	MIL-A-8243D LOT # F-21472-D	Colorless	Edgewater, NJ (USA)	02-02-19	M037	04-10-05

Table 2 - Surface Tension, pH and Refractive Index

**DEICING FLUID ARCTON LTD
ARCTICA DG, LOT # 55**

Fluid	Surface Tension		pH		Refractive Index	
	T (°C)	dynes/cm	T (°C)	Value	T (°C)	Value
<i>G736</i>	20	41.8	20	9.62	20	1.4132
<i>M037</i>	22	41.8	22	9.24	20	1.4276

This page left blank.

Table 3 - Brookfield Viscosity (mPa·s)

**DEICING FLUID ARCTON LTD
ARCTICA DG, LOT # 55**

Fluid	Temp (°C)	0.3 RPM		6 RPM		30 RPM	
		Viscosity	Accuracy	Viscosity	Accuracy	Viscosity	Accuracy
G736	20	< 20	200 ⁽¹⁾	11	10 ⁽¹⁾	11.2	2 ⁽¹⁾
	0	40	200 ⁽¹⁾	29	10 ⁽¹⁾	29.0	2 ⁽¹⁾
	-10	60	200 ⁽¹⁾	54	10 ⁽¹⁾	54.0	2 ⁽¹⁾
	-20	120	200 ⁽¹⁾	116	10 ⁽¹⁾	116	2 ⁽¹⁾
	-30	300	1000 ⁽²⁾	295	50 ⁽²⁾	296	10 ⁽²⁾
Sheared	20	< 20	200 ⁽¹⁾	11	10 ⁽¹⁾	11.0	2 ⁽¹⁾

Fluid	Temp (°C)	0.3 RPM		6 RPM		30 RPM	
		Viscosity	Accuracy	Viscosity	Accuracy	Viscosity	Accuracy
M037	20	40	200 ⁽¹⁾	38	10 ⁽¹⁾	38.2	2 ⁽¹⁾
	0	140	200 ⁽¹⁾	145	10 ⁽¹⁾	147.6	2 ⁽¹⁾
	-10	360	200 ⁽¹⁾	348	10 ⁽¹⁾	366	10 ⁽²⁾
	-20	1 200	1000 ⁽²⁾	1 125	50 ⁽²⁾	1 240	40 ⁽³⁾
	-30	3 500	1000 ⁽²⁾	3 480	50 ⁽²⁾	3 508	40 ⁽³⁾

⁽¹⁾: spindle number

This page left blank.

Table 4 - Aerodynamic Performance Test Data: Fluid as received

**DEICING FLUID ARCTON LTD
ARCTICA DG, LOT # 55**

HIGH SPEED RAMP

TEST CODE	T _a °C	T _f °C	Rh %	t ₀ ⁽¹⁾ µm	t _{end} ⁽²⁾ µm	FE ⁽³⁾ %	WC ⁽⁴⁾ %	V ⁽⁵⁾ m/s	δ* mm
G736A305	0.1	0.0	80.3	2067	76	96.3	6.69*	66.5	3.80
G736A306	-0.6	-0.2	77.0	2067	51	97.5	5.72*	66.7	3.74
G736A304	-0.8	-0.4	76.0	2067	43	97.9	4.99*	67.0	3.76
G736E317	-20.4	-19.8	56.2	1867	196	89.5	0.85	67.2	5.98
G736E318	-20.7	-20.3	55.7	2000	170	91.5	0.12	67.0	6.13
G736E319	-20.6	-20.4	56.4	2000	152	92.4	0.00	67.0	6.03
G736H328	-33.4	-32.6	56.8	1867	254	86.4	0.12	68.5	9.44
G736H329	-35.1	-33.7	52.3	1867	246	86.8	0.00	67.7	9.13
G736H330	-35.9	-33.8	52.1	1867	254	86.4	0.36	68.0	9.03
G736H327	-34.8	-33.9	53.0	1867	246	86.8	0.00	67.9	9.92
G736H326	-37.2	-35.7	48.1	1800	246	86.3	0.85	66.4	10.59

*caution : value outside the ± 2% range

Acceptance Criteria :

D₀ = 8.74 mm D₋₁₀ = 9.34 mm D₋₁₅ = 9.65 mm D₋₂₀ = 9.95 mm

-
- (1) Thickness of the fluid measured at the beginning of the test.
 - (2) Thickness of the fluid measured at the end of the test.
 - (3) Fluid Elimination.
 - (4) Water Change.
 - (5) Air velocity 30 seconds after the beginning of the test.

This page left blank.

ARCTON LTD
ARCTICA DG, Lot # 55

High Speed Ramp Test

AMIL 2006-04-06

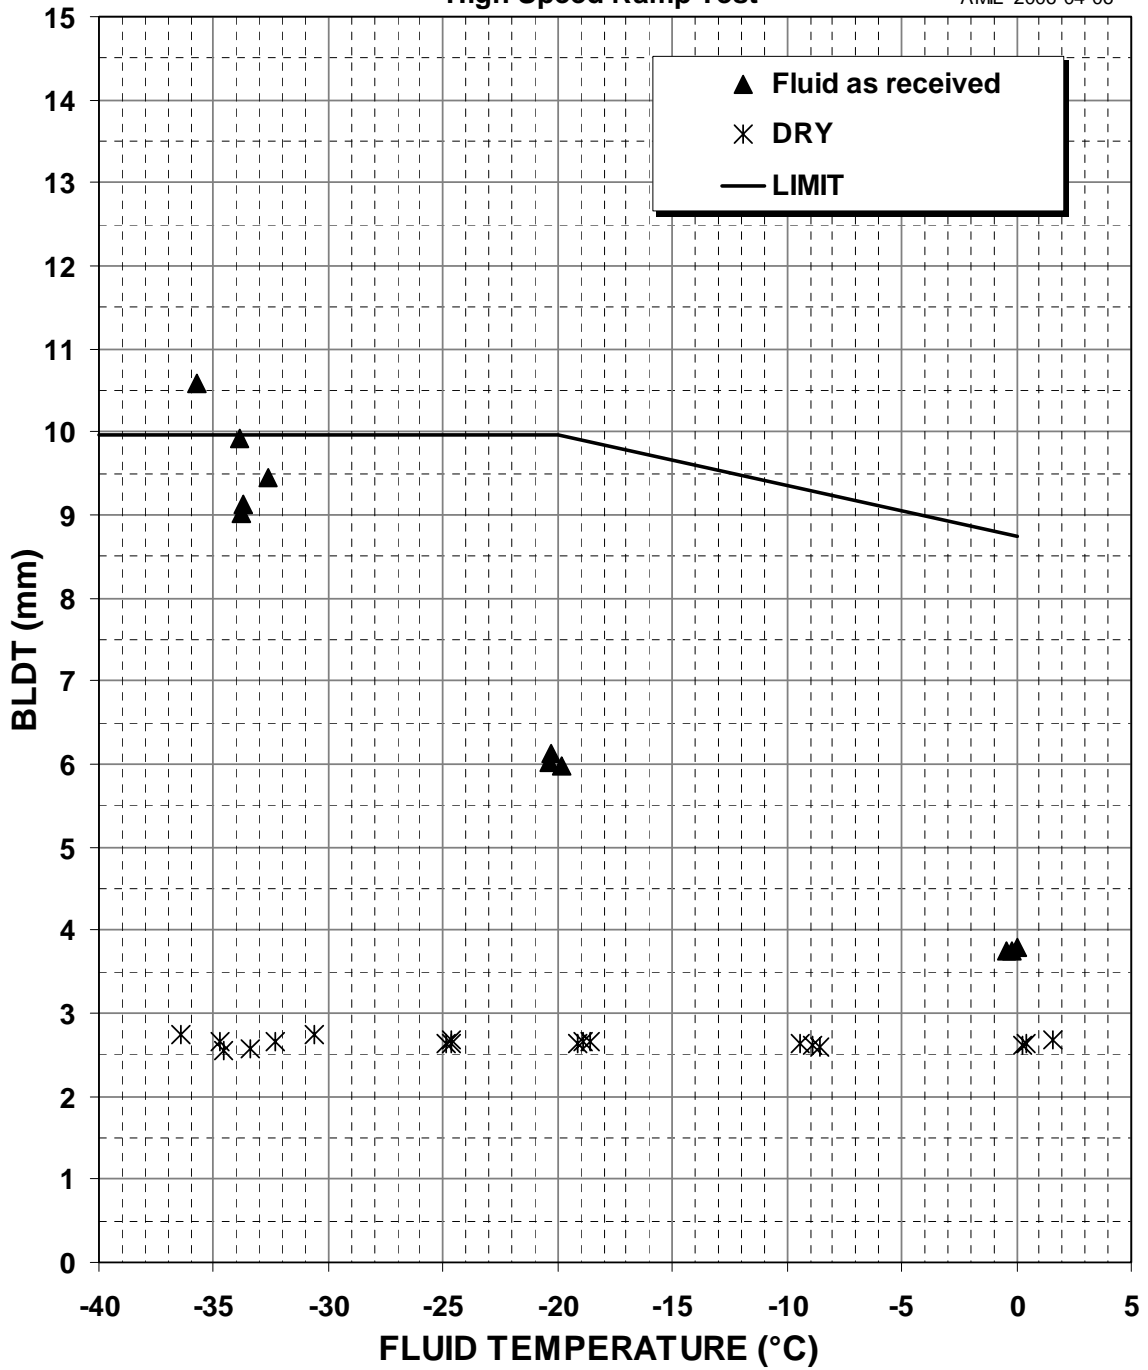


Figure 1 - Aerodynamic Test Results

This page left blank.

ARCTON LTD
ARCTICA DG, Lot # 55

High Speed Ramp Test

AMIL 2006-04-06

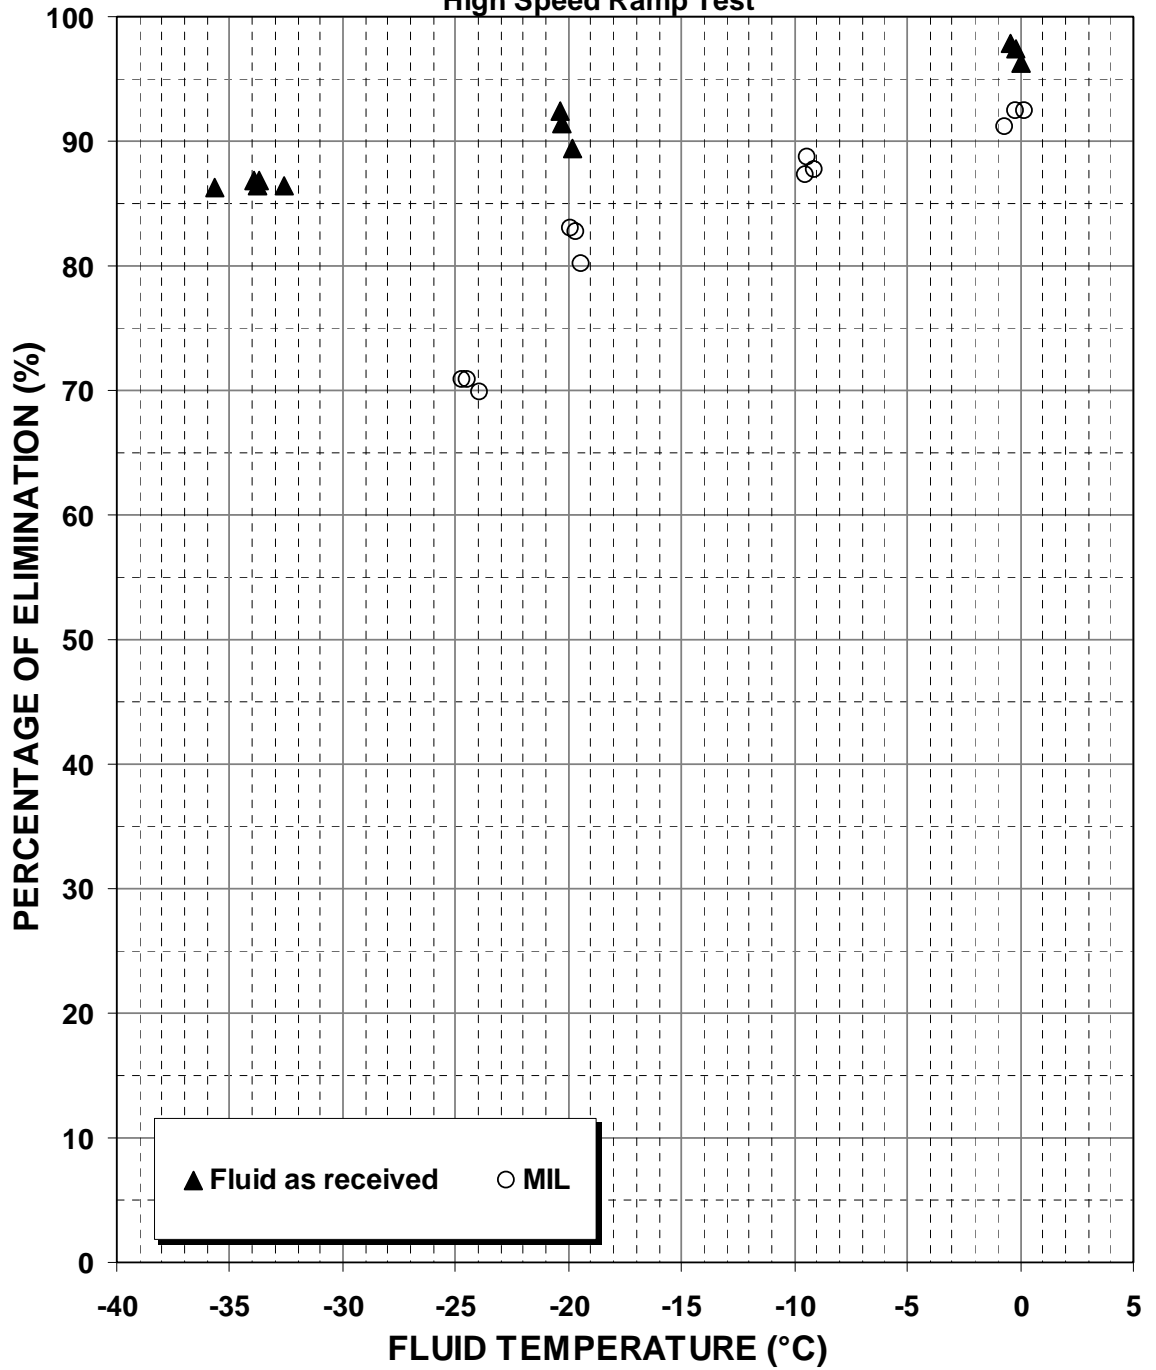


Figure 2 - Fluid Elimination

This page left blank.

ARCTON LTD
ARCTICA DG, Lot # 55

High Speed Ramp Test

AMIL 2006-04-06

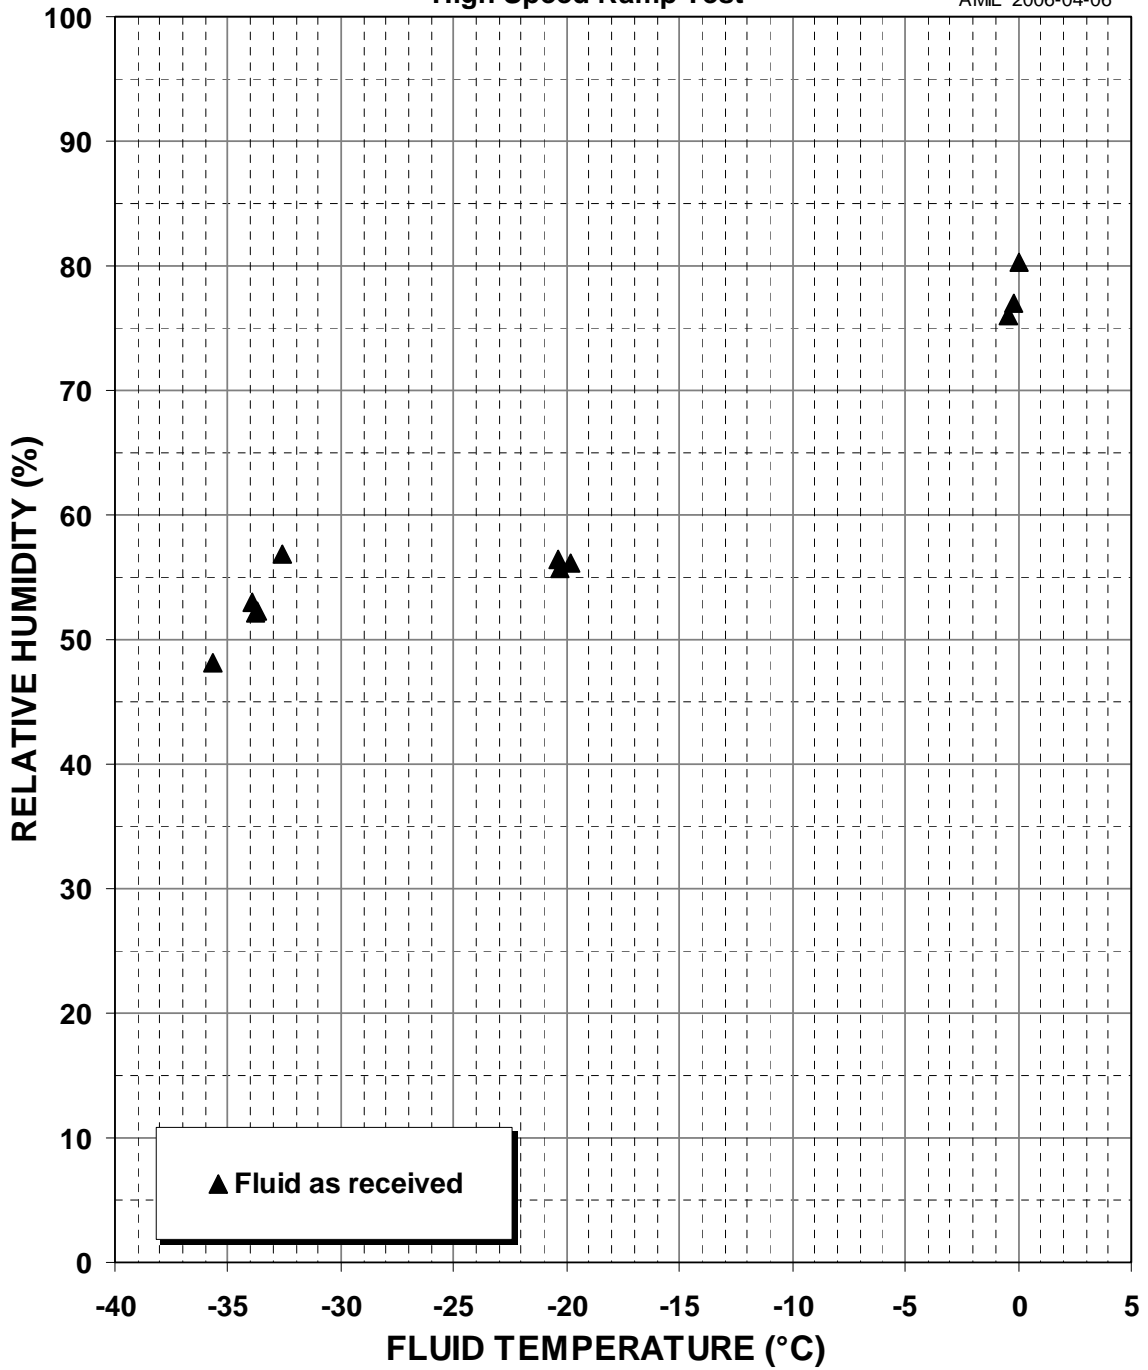


Figure 3 - Relative Humidity

This page left blank.


**Table 5 - Refractive Index Data and Water Change:
Fluid as received**

**DEICING FLUID ARCTON LTD
ARCTICA DG, LOT # 55**

TEST CODE	RI	RI	Δ RI	WC	Rh
	Initial	Final		% W/W	%
G736A305	1.4130	1.4075	-0.0055	6.69*	80.3
G736A306	1.4130	1.4083	-0.0047	5.72*	77.0
G736A304	1.4130	1.4089	-0.0041	4.99*	76.0
G736E317	1.4133	1.4126	-0.0007	0.85	56.2
G736E318	1.4128	1.4127	-0.0001	0.12	55.7
G736E319	1.4130	1.4130	0.0000	0.00	56.4
G736H328	1.4131	1.4130	-0.0001	0.12	56.8
G736H329	1.4131	1.4131	0.0000	0.00	52.3
G736H330	1.4132	1.4129	-0.0003	0.36	52.1
G736H327	1.4130	1.4130	0.0000	0.00	53.0
G736H326	1.4133	1.4126	-0.0007	0.85	48.1

*caution : value outside the \pm 2% range

This page left blank.

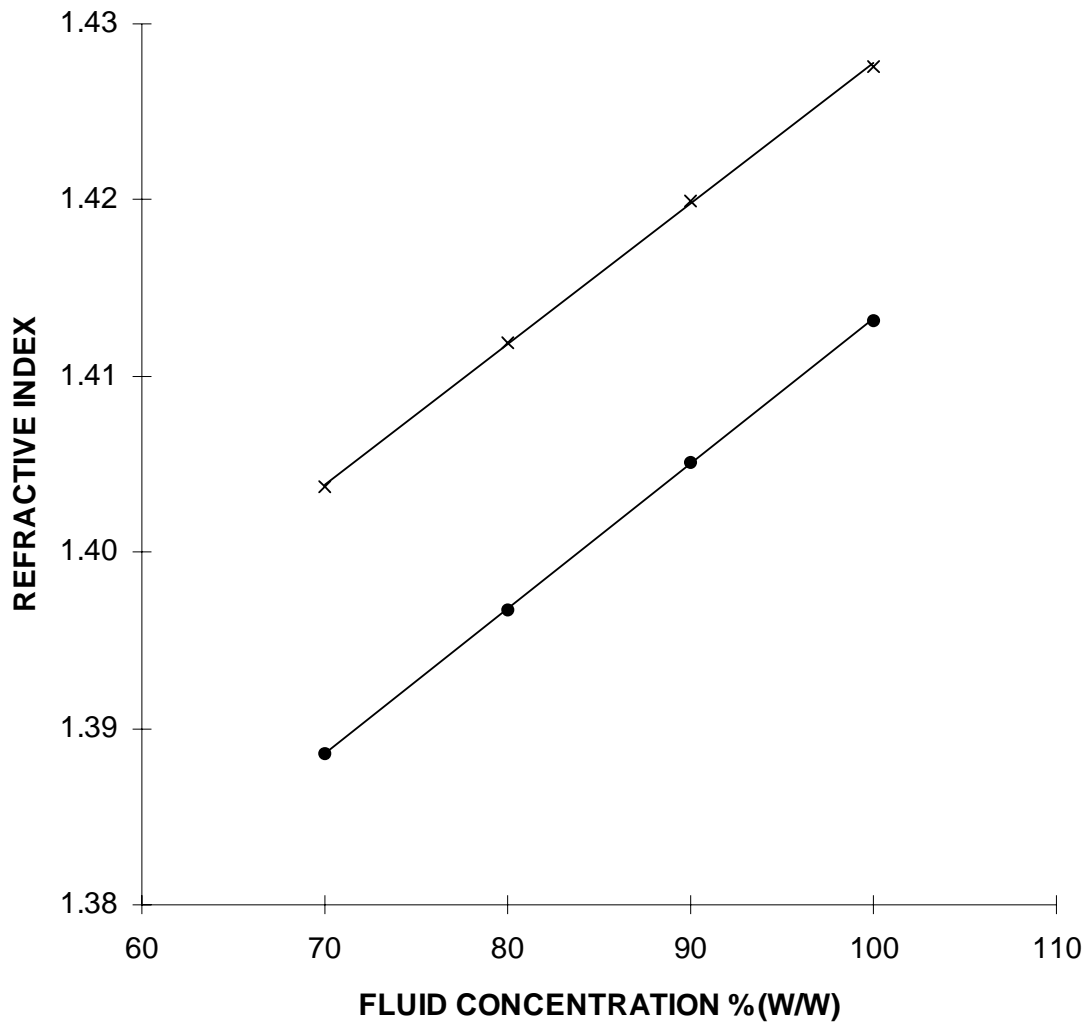

× M037 ● G736

M037: $RI = 0.000797 \%(w/w) + 1.348030$

G736: $RI = 0.000822 \%(w/w) + 1.331030$

BASIS : 100% (w/w) corresponds to NEAT fluid

Figure 4 - Refractive Index versus Water Content

This page left blank.

TEST DESCRIPTION

This page left blank.

1. INTRODUCTION

This report details the performance of fluid samples, identified in Table 1, when subjected to the Flat Plate Elimination Test, denoted FPET hereafter. The FPET procedure follows the SAE Aerospace Material Specifications, AMS 1424G [1] and Aerospace Standard AS 5900 [2] for deicing fluid on the high speed ramp. The tests were carried out in the Luan Phan refrigerated wind tunnel of the "Anti-icing Materials International Laboratory" (AMIL) at the "Université du Québec à Chicoutimi" (UQAC) [1]. UQAC facility is operated independently from fluid manufacturers and meets the requirements of the aerodynamic acceptance testing standards. It was found qualified on September 11, 1997 (reconfirmed October 25, 2002) by the Performance Review Institute according to PRI document AC3001, "audit criteria for compliance to SAE AMS 1424 and AMS 1428".

2. TEST DESCRIPTION

2.1 Flat Plate Elimination Test

This test is designed to measure the Boundary Layer Displacement Thickness, BLDT, which is related to lift loss [4]. The flat plate set-up consists of a duct inserted in the test section of AMIL refrigerated wind tunnel. In this tunnel, the airflow and the fluid can be maintained at a constant temperature, between $5 \pm 1^\circ\text{C}$ and $-45 \pm 2^\circ\text{C}$. A set-up sketch is given in Figure 5.

The FPET procedure consists in submitting a 2 mm thick layer of deicing product covering the duct floor to an accelerating air flow of 2.6 m/s^2 , simulating a large transport-type aircraft take-off (Figure 6). The BLDT on the flat plate is measured at pressure tap location # 3 (Figure 5), thirty seconds after the beginning of the simulated take-off. A detailed description of this test is presented in AS 5900 [2].

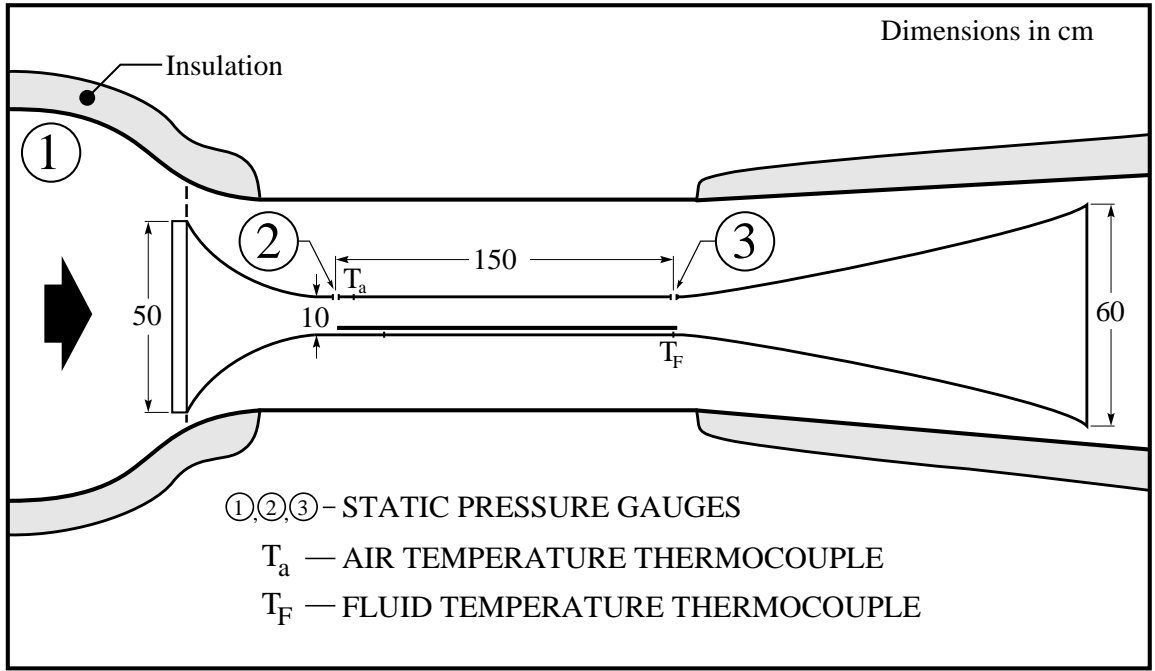


Figure 5 - FPET Set-up

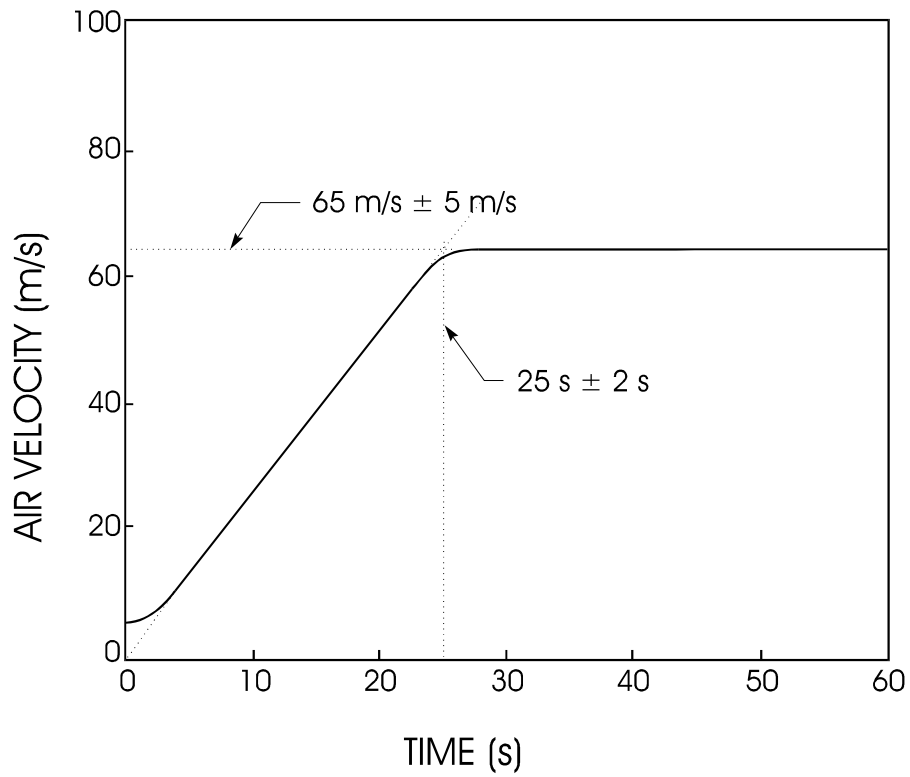


Figure 6 - Take-off Ground Acceleration Simulation

2.2 Measurements

In a FPET, the fluid performance is evaluated from BLDT measurements. The BLDT value used for the fluid evaluation is the average of the BLDT measured between the 27th and the 33rd seconds after the beginning of the test. The starting time ($t = 0$) is evaluated by extrapolating the straight line of the acceleration ramp to the point where $V = 0$ m/s.

In addition, the following parameters are measured:

1. **surface tension at room temperature (dynes/cm)**
2. **pH at room temperature**
3. **refractive index which is used to determine the water change (%)**
4. **viscosity at room and test temperatures (mPa . s)**
5. **fluid film thickness (μm) at the beginning and at the end of the FPET to compute fluid elimination (%)**

2.3 Calibration and Acceptance Criteria

The calibration is obtained from dry tests, performed without fluid, and reference fluid tests, using the MIL-A-8243D deicing fluid, for which BLDT results are well documented. The BLDT values obtained from a dry test should be 2.5 ± 0.4 mm. For dry and calibration tests, the BLDT values are recorded at four temperatures: 0°C , -10°C , -20°C and -25°C .

Reference fluid BLDT values and dry BLDT values are used to calculate the acceptance criteria required for certification. A candidate fluid is acceptable at a test temperature if none of the independent BLDT measurements is greater than the acceptance criteria. This test temperature is the average of the three lowest temperatures of the acceptable data points.

3. TEST RESULTS

3.1 Test Presentation

The fluid identification is presented in Table 1 and the fluid physical properties in the following tables : Surface tension, pH and refractive index values are given in Table 2 and Brookfield viscosity values in Table 3. FPET results are presented in Table 4. Calibration data from dry tests and tests with the reference fluid are reproduced in Table 6 and Table 7 respectively. Finally, Table 5 presents refractive index data and water change calculations. Figure 4 shows the refractive index as a function of water change. Fluid elimination and relative humidity are presented as a function of test temperature in Figure 2 and Figure 3 respectively.

3.2 Calculation of the Calibration and Acceptance Criteria

Calibration tests, as defined in section 2.3, consist of dry tests and tests with the reference fluid. The dry test results are presented in Table 6. According to specifications [1], the AMIL system is considered adequately calibrated, since the dry test BLDT value (δ^*) varies within the standard range of 2.5 ± 0.4 mm. The reference fluid results are presented in Table 7. These results are also in agreement with known values. As mentioned in section 2.3, dry and reference fluid BLDT values are used to compute the criteria of acceptance, presented below and in Figure 7. Below -20°C , the acceptance envelope is a constant straight line with a BLDT equal to the value D20. Between -20°C and 0°C , the acceptance envelope is a straight line from D20, at -20°C , to D0, at 0°C . The D20 and D0 are calculated accordingly to the AS 5900 standard for the high speed ramp:

Calculation of acceptance level at -20°C :	Calculation of acceptance level at 0°C :
$D20 = \delta_{ref}^* - 0.18 (\delta_{ref}^* - \delta_{dry}^*)_{-20}$	$D0 = \delta_{ref}^* + 0.71 (\delta_{ref}^* - \delta_{dry}^*)_0$
$D20 = 11.56 - 0.18 \times (11.56 - 2.64) = 9.95 \text{ mm}$	$D0 = 6.21 + 0.71 \times (6.21 - 2.64) = 8.74 \text{ mm}$

Table 6 - Dry Test Data

TEST CODE	T _a (°C)	T _f (°C)	Rh (%)	V ⁽¹⁾ (m/s)	δ_{dry}^* (mm)
DRY_A399	-0.1	1.6	79.6	65.6	2.67
DRY_A401	-0.4	0.4	71.5	65.3	2.64
DRY_A400	0.0	0.3	77.8	66.4	2.62
DRY_C407	-10.0	-8.6	68.5	65.5	2.59
DRY_C406	-10.1	-8.9	67.6	66.2	2.62
DRY_C405	-11.1	-9.4	72.6	66.2	2.63
DRY_E411	-19.9	-18.6	59.5	65.9	2.65
DRY_E412	-20.2	-18.9	58.5	65.9	2.66
DRY_E410	-21.1	-19.1	62.8	65.1	2.64
DRY_F415	-26.9	-24.6	56.8	65.9	2.67
DRY_F416	-26.2	-24.6	63.0	65.8	2.64
DRY_F417	-26.8	-24.9	59.8	65.7	2.64
DRY_H422	-31.5	-30.6	56.9	66.9	2.74
DRY_H424	-33.0	-32.3	56.5	66.4	2.65
DRY_H426	-34.2	-33.4	55.4	65.9	2.57
DRY_H425	-37.1	-34.6	51.4	64.9	2.55
DRY_H423	-36.8	-34.7	52.1	65.1	2.65
DRY_H421	-39.0	-36.4	46.3	66.5	2.75

⁽¹⁾ Air velocity 30 seconds after the beginning of the test

**Table 7 - Aerodynamic Performance Test Data :
Reference Fluid**

TEST CODE	T_a °C	T_f °C	Rh %	t_o⁽¹⁾ μm	t_{end}⁽²⁾ μm	FE⁽³⁾ %	WC⁽⁴⁾ %	V⁽⁵⁾ m/s	δ* mm
M037A375	0.1	0.2	79.7	1800	135	92.5	8.16*	68.3	6.35
M037A377	0.2	-0.2	80.2	1800	135	92.5	8.41*	68.2	6.24
M037A376	-0.9	-0.7	74.2	1800	160	91.1	7.28*	67.7	6.53
M037C380	-9.8	-9.1	70.9	1800	221	87.7	3.39*	67.5	8.48
M037C378	-9.9	-9.4	72.4	1800	203	88.7	3.26*	67.6	8.40
M037C379	-10.5	-9.5	66.6	1800	229	87.3	3.89*	67.2	8.78
M037E382	-20.2	-19.4	57.0	1800	356	80.2	1.13	66.7	11.32
M037E381	-20.3	-19.7	60.3	1800	312	82.7	1.25	67.0	11.46
M037E383	-20.5	-19.9	55.4	1800	305	83.0	1.51	66.6	11.57
M037F385	-25.3	-23.9	54.0	1800	541	69.9	0.63	65.3	12.73
M037F384	-25.8	-24.5	56.3	1800	526	70.8	0.88	65.4	12.75
M037F386	-25.8	-24.7	57.5	1800	526	70.8	0.63	65.6	12.96

*caution value outside the ± 2% range

-
- (1) Thickness of the fluid measured at the beginning of the test.
 - (2) Thickness of the fluid measured at the end of the test.
 - (3) Fluid Elimination.
 - (4) Water Change.
 - (5) Air velocity 30 seconds after the beginning of the test.

**Table 8 - Refractive Index Data and Water Change:
Reference Fluid**

TEST CODE	RI Initial	RI Final	Δ RI	WC % W/W	Rh %
M037A375	1.4272	1.4207	-0.0065	8.16*	79.7
M037A377	1.4274	1.4207	-0.0067	8.41*	80.2
M037A376	1.4272	1.4214	-0.0058	7.28*	74.2
M037C380	1.4274	1.4247	-0.0027	3.39*	70.9
M037C378	1.4274	1.4248	-0.0026	3.26*	72.4
M037C379	1.4274	1.4243	-0.0031	3.89*	66.6
M037E382	1.4276	1.4266	-0.0010	1.25	57.0
M037E381	1.4276	1.4264	-0.0012	1.51	60.3
M037E383	1.4275	1.4266	-0.0009	1.13	55.4
M037F385	1.4275	1.4270	-0.0005	0.63	54.0
M037F384	1.4275	1.4268	-0.0007	0.88	56.3
M037F386	1.4275	1.4270	-0.0005	0.63	57.5

*caution value outside the \pm 2% range

ARCTON LTD
ARCTICA DG, Lot # 55

High Speed Ramp Test

AMIL 2006-04-06

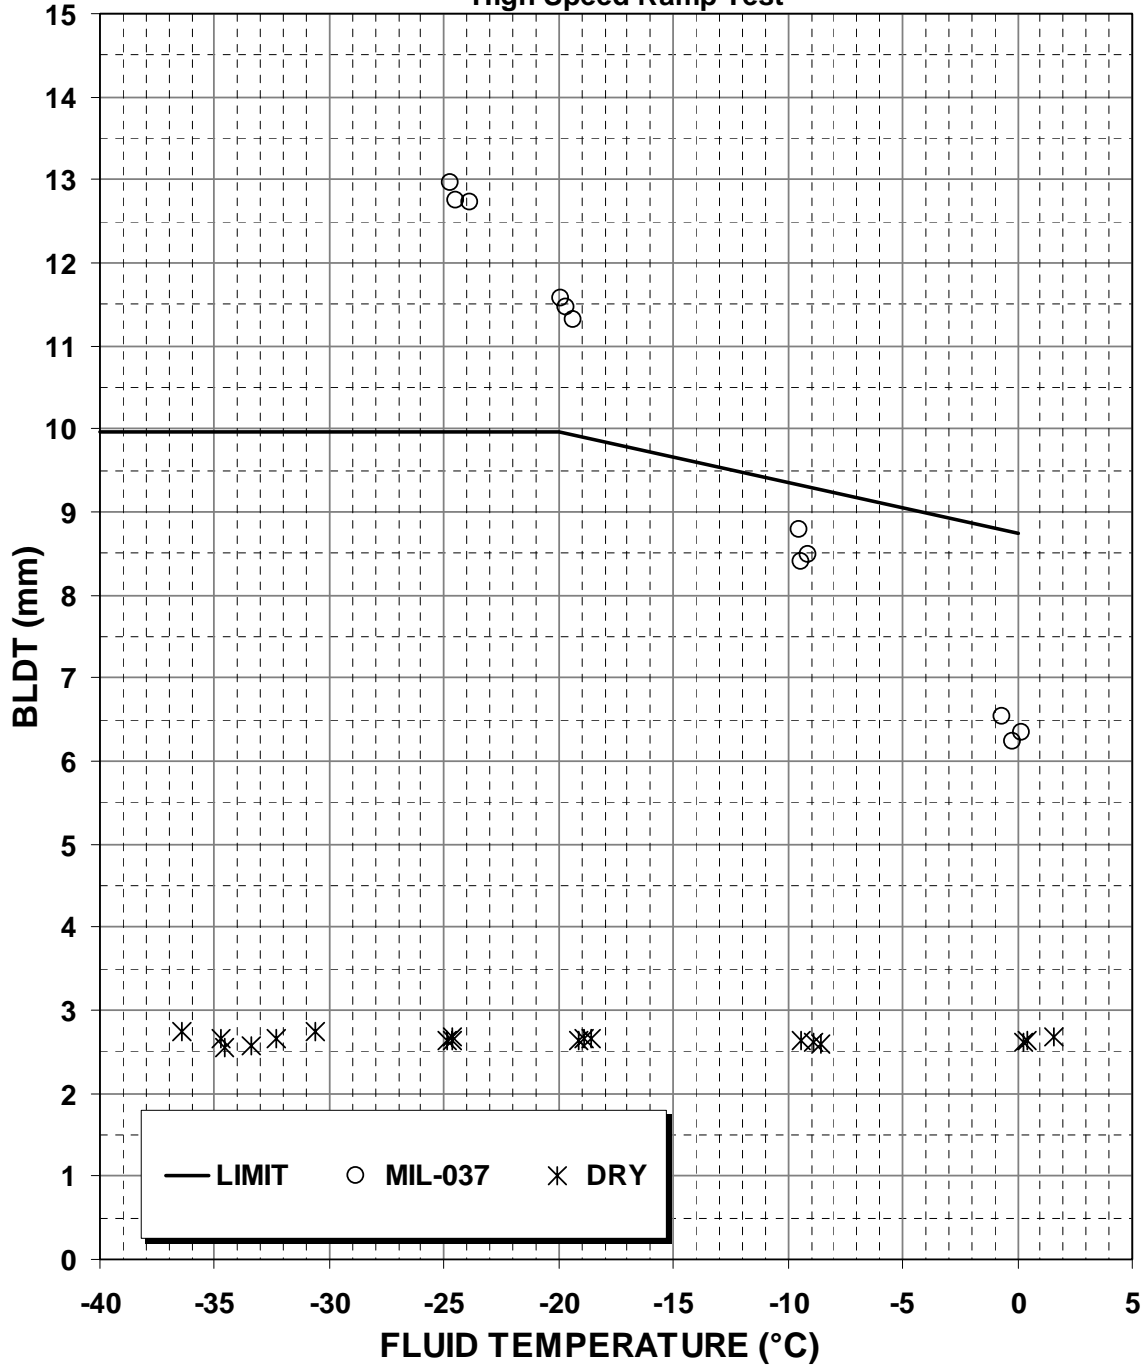


Figure 7 - Acceptance Criteria

3.3 Flat Plate Elimination Tests

BLDT, fluid elimination and water change values are listed in Table 4 for each test. In Figure 1, BLDT values are presented in comparison with the acceptance criteria. This figure shows that the candidate fluid **ARCTON LTD ARCTICA DG LOT # 55** is acceptable with the high speed ramp above -33.5°C in the case of the fluid as received.

4. REFERENCES

- [1] Aerospace Material Specifications: AMS 1424G Deicing/Anti-icing Fluid Aircraft, SAE Type I (January 2006) and AMS 1428D Non-Newtonian (Pseudoplastic) SAE Type II, III and IV (February 2002).
- [2] Aerospace Standard AS 5900, Standard Test Method for Aerodynamic Acceptance of SAE AMS1424 and SAE AMS1428 Aircraft De/Anti-icing Fluids, (February 2003).
- [3] Laforte, J.L., Louchez, P., Bouchard, G. and Ma, F. (1990) "A Facility to Evaluate Performance of Aircraft De/Anti-icing Fluids Subjected to Freezing Rain". Cold Regions Science and Technology 18, p. 161-171.
- [4] Laforte, J.L., Louchez, P., Bouchard, G. (1993) "Experimental Evaluation of Flat Plate Boundary Layer Growth over an Anti-icing Fluids Film". Canadian Aeronautics and Space Journal, vol. 39, No. 2, June 1993, p.96- 104.

This page left blank.

ATTACHMENT 1

Measurement Principle*

The time varying velocity at the inlet of the test section will be derived from the measurement of the pressure difference $P_1 - P_2$, recorded as a function of time during all test runs. For such purpose, the following relation, obtained from application of Bernoulli and continuity equations according to usual wind tunnel practice, will be used:

$$V = \sqrt{\frac{2(P_1 - P_2)}{\rho} \left/ \left(1 - \left[\frac{S_2}{S_1} \right]^2 \right) \right.} \quad (1)$$

where ρ is the mass per unit volume of the test gas at the test conditions, and S_1/S_2 is the area ratio of the wind tunnel contraction.

The boundary layer displacement thickness (BLDT) on the bottom flat plate, at the location of the pressure tap P_3 (cross-section 3), will be evaluated from the measurement of the two pressure differences $P_1 - P_2$ and $P_1 - P_3$ recorded as functions of time during all the test runs.

Indeed, an increase in BLDT from inlet to outlet of the test section causes a restriction of the net cross-sectional area, thus producing an increase in the air velocity along the test section, which in turn causes a decrease of static pressure from cross-section 2 to 3.

* This text reproduces Appendix B of DOCUMENT NO D6-55573: "Aerodynamic Acceptance Test for Aircraft Ground Deicing/Anti-icing Fluids". BOEING Commercial Airplane Company.

More precisely, the average BLDT δ_{ave}^* over the test section perimeter, at cross-section 3, will be evaluated using following relation, obtained from application of mass conservation and Bernouilli equations:

$$\delta_{ave}^* = \frac{1}{c} \left[S_3 - S_2 \sqrt{\frac{P_1 - P_2}{(P_1 - P_2) + (P_2 - P_3)}} \right] \quad (2)$$

where c is the test section perimeter at cross-section 3, and S_2 and S_3 are the areas of cross-sections 2 and 3 respectively.

When no fluid is present on the bottom flat plate, all four test section walls are in the same dry state, and the previous expression (2) yields the value of the BLDT on a dry wall:

$$\delta_{dry}^* = \delta_{ave}^* \quad (\text{with no fluid})$$

On the other hand, when the bottom plate of the test section is covered with a layer of de/anti-icing fluid, and the top and sides are not, the BLDT is not constant over the perimeter of the cross-section 3. Indeed, it assumes a value δ^* on the bottom plate and another value on the sides and top wall. Expressing the previously determined δ_{ave}^* as a perimeter-weighted average of δ_{dry}^* and δ^* , the following relation can be obtained:

$$\delta_{ave}^* = \frac{c}{b} \left[\delta_{dry}^* - \frac{c-b}{c} \delta^* \right] \quad (3)$$

where b is the width of the bottom flat plate. This relation will be used to derive the BLDT over a wet surface, δ^* , from the measurement of δ_{ave}^* carried out as explained with fluid on the bottom test section wall, provided an expression for

δ_{dry}^* has been previously determined by a number of "dry" runs, carried out without any fluid in the test section. More precisely, these dry runs, to be made during the setting up and calibration of the facility, will yield the value of δ_{dry}^* and they will be used to determine the constant in the following empirical formula:

$$\delta_{dry}^* = const \times \left[\frac{V}{n} \right]^{-1/5} \quad (4)$$

where V is the tunnel air velocity at cross-section 2 and n is the cinematic viscosity of the test gas at the test conditions. For data reduction of a test with fluid in the test section, this last expression (4) will be used to evaluate, as function of the instantaneous velocity determined by (1), the value of δ_{dry}^* to be used in expression (3).

This page left blank.

ATTACHMENT 2


TEST DATA SHEETS

DRY RUNS	37
RUNS WITH REFERENCE FLUID M-037	57
ARCTICA DG LOT # 55, FLUID AS RECEIVED G-736.....	71

This page left blank.

DRY RUNS

DRY_A399

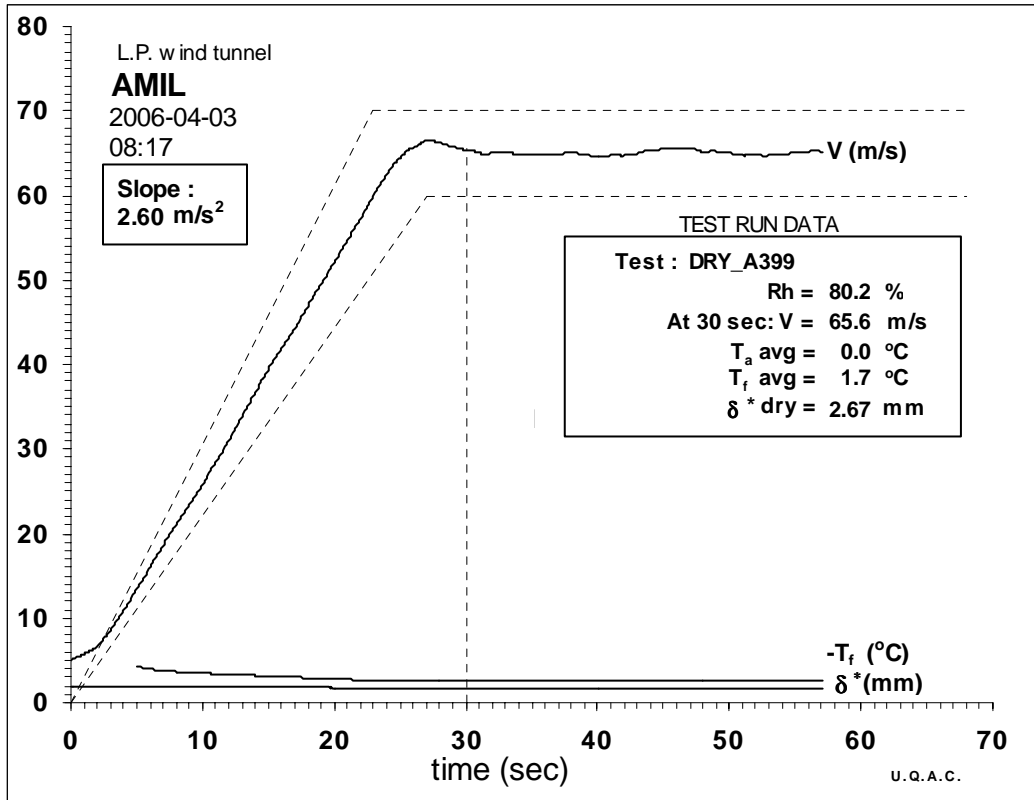

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-0.1	1.6	79.7	11.25	66.3	-0.20	2.66
28	-0.2	1.7	79.4	11.26	66.3	-0.17	2.70
29	-0.2	1.7	79.5	11.53	67.1	-0.21	2.65
30	-0.2	1.6	79.5	10.61	64.3	-0.20	2.63
31	-0.2	1.6	79.7	10.71	64.6	-0.18	2.67
32	-0.1	1.6	79.6	10.90	65.2	-0.17	2.69
33	-0.1	1.6	80.0	11.05	65.7	-0.20	2.65


Averages:

30	-0.1	1.6	79.6	11.03	65.6	-0.19	2.67
----	------	------------	------	-------	------	-------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

DRY_A400

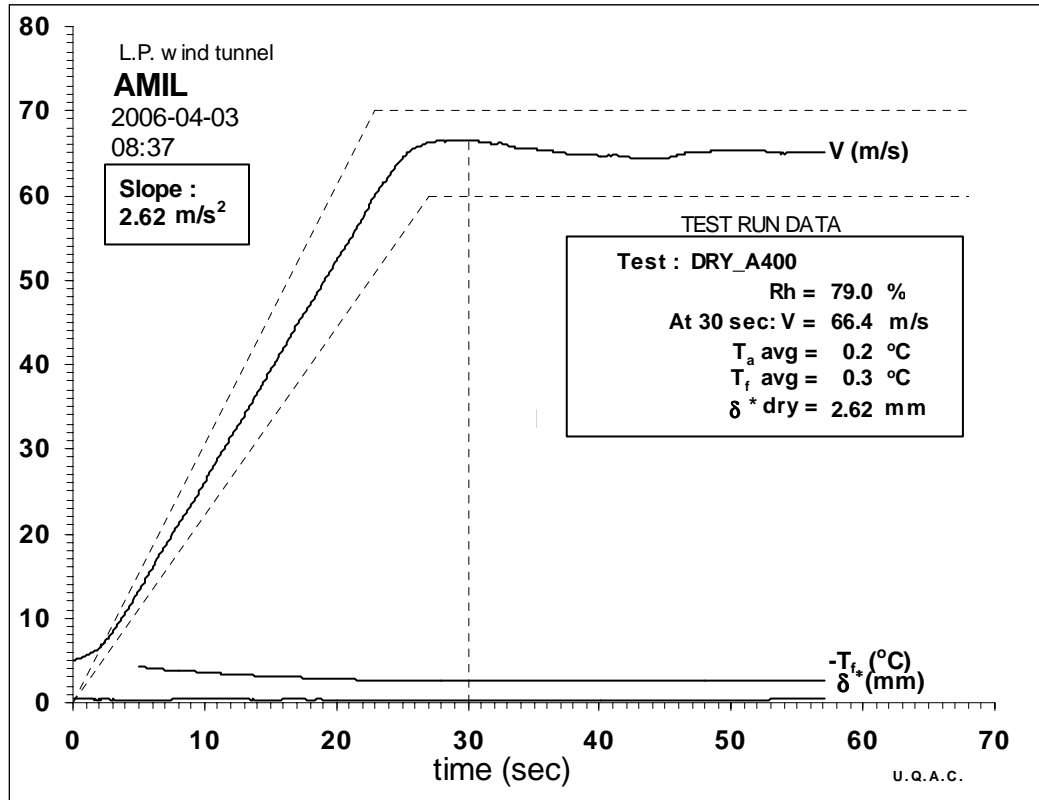

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-0.1	0.3	77.6	11.38	66.6	-0.25	2.57
28	0.1	0.3	77.6	11.33	66.5	-0.22	2.62
29	0.0	0.3	77.7	11.29	66.4	-0.24	2.60
30	0.0	0.3	77.6	11.20	66.1	-0.20	2.65
31	0.0	0.3	77.9	11.44	66.8	-0.23	2.61
32	0.0	0.3	77.9	11.34	66.5	-0.21	2.63
33	0.0	0.3	78.2	10.93	65.3	-0.18	2.68


Averages:

30	0.0	0.3	77.8	11.28	66.4	-0.22	2.62
----	-----	------------	------	-------	------	-------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

DRY_A401

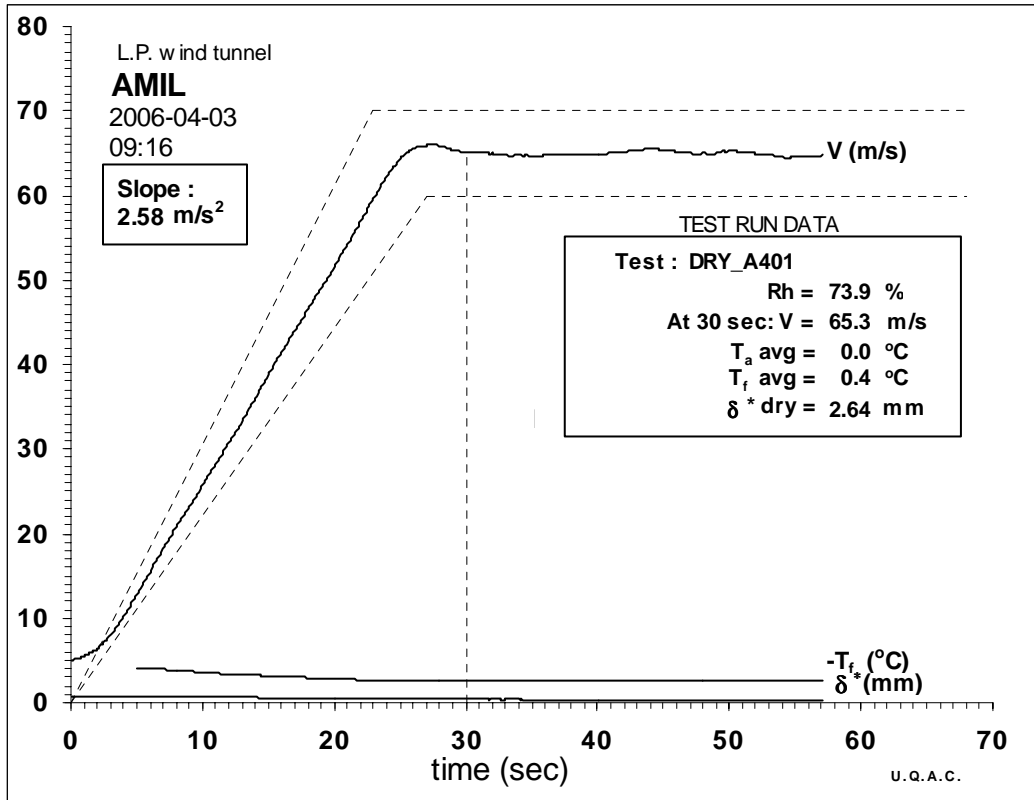

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-0.4	0.4	71.6	11.42	66.7	-0.20	2.66
28	-0.4	0.4	71.6	11.15	65.9	-0.22	2.61
29	-0.4	0.4	71.5	10.65	64.4	-0.20	2.64
30	-0.4	0.4	71.4	10.96	65.3	-0.21	2.62
31	-0.4	0.4	71.6	10.98	65.4	-0.20	2.64
32	-0.4	0.4	71.6	10.75	64.7	-0.18	2.68
33	-0.4	0.4	71.5	10.93	65.3	-0.19	2.66


Averages:

30	-0.4	0.4	71.5	10.94	65.3	-0.20	2.64
----	------	------------	------	-------	------	-------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

DRY_C405

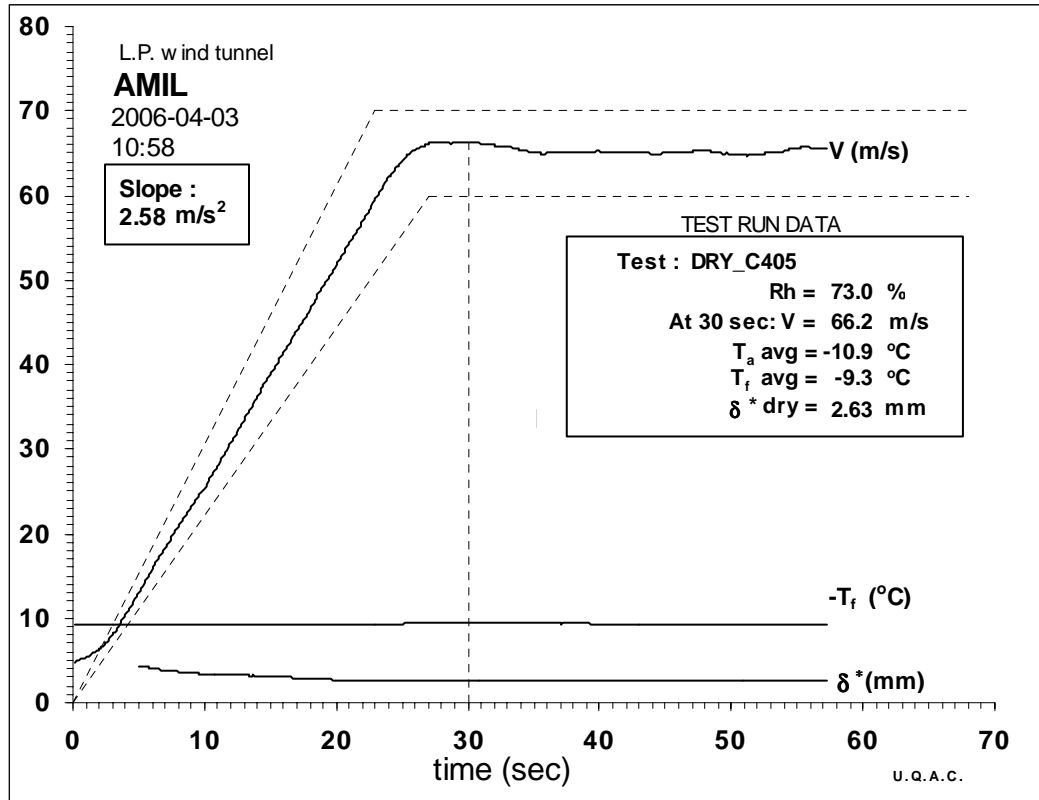

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-11.0	-9.4	72.7	11.76	66.4	-0.20	2.67
28	-11.2	-9.4	72.6	11.63	66.0	-0.22	2.64
29	-11.1	-9.4	72.5	11.81	66.5	-0.24	2.60
30	-11.1	-9.4	72.6	11.67	66.1	-0.22	2.63
31	-11.1	-9.4	72.7	11.72	66.2	-0.20	2.66
32	-11.1	-9.4	72.7	11.65	66.1	-0.23	2.61
33	-11.0	-9.4	72.7	11.56	65.8	-0.21	2.65


Averages:

30	-11.1	-9.4	72.6	11.69	66.2	-0.22	2.63
----	-------	-------------	------	-------	------	-------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

DRY_C406

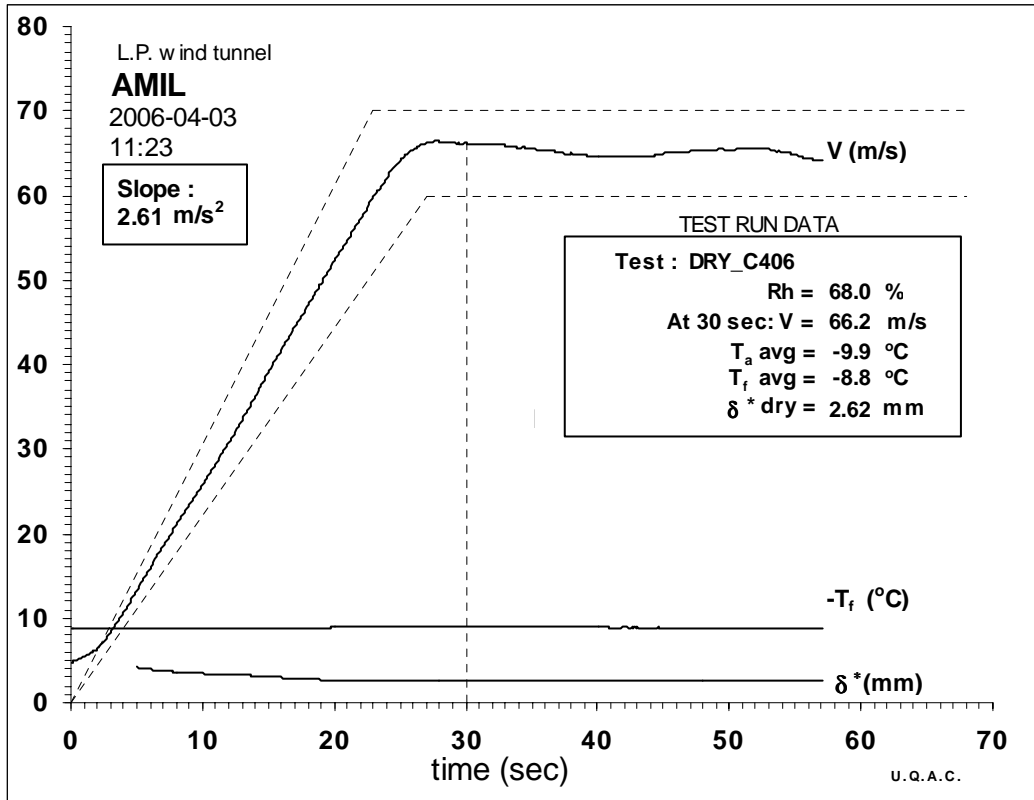

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-10.2	-9.0	67.4	11.83	66.7	-0.21	2.65
28	-10.1	-8.9	67.2	11.72	66.4	-0.22	2.64
29	-10.1	-8.9	67.6	11.61	66.0	-0.22	2.63
30	-10.1	-8.9	67.4	11.50	65.7	-0.25	2.58
31	-10.1	-8.9	67.8	11.75	66.4	-0.22	2.64
32	-10.1	-8.9	67.8	11.56	65.9	-0.23	2.61
33	-10.1	-8.9	67.9	11.70	66.3	-0.24	2.60


Averages:

30	-10.1	-8.9	67.6	11.65	66.2	-0.23	2.62
----	-------	-------------	------	-------	------	-------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

DRY_C407

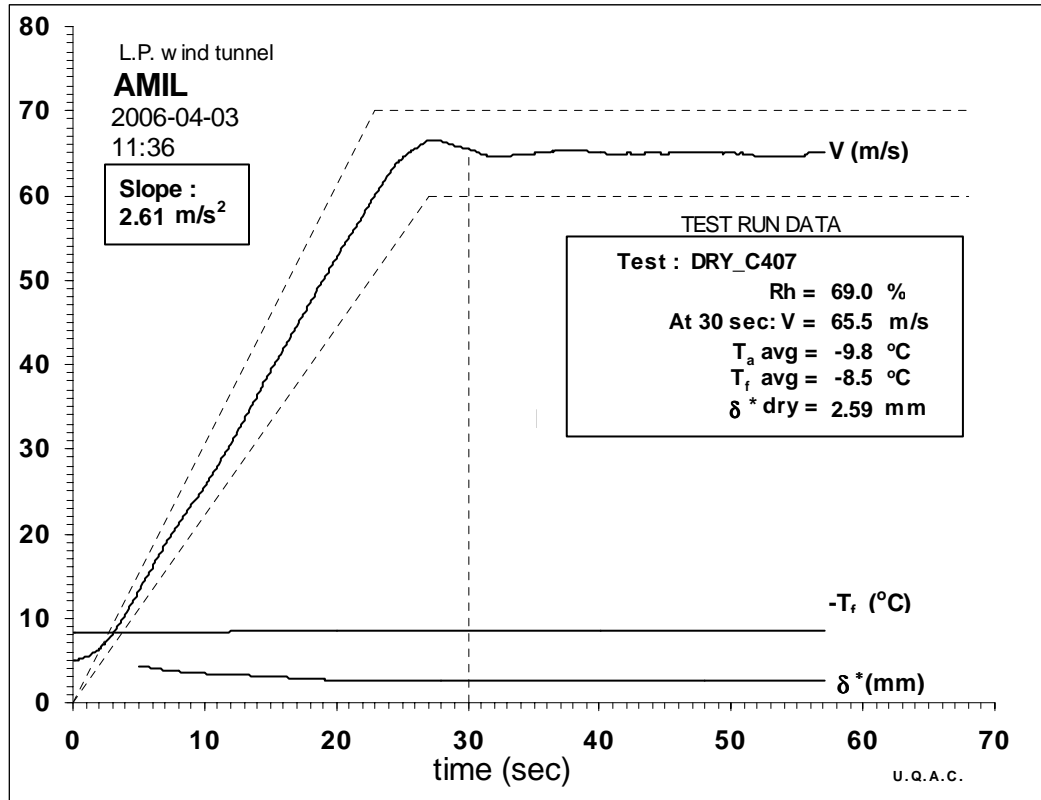

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-10.1	-8.5	68.6	11.52	65.8	-0.22	2.62
28	-10.0	-8.6	68.1	11.75	66.5	-0.25	2.59
29	-10.0	-8.6	68.3	11.99	67.1	-0.26	2.58
30	-10.0	-8.6	68.4	11.30	65.2	-0.26	2.55
31	-10.0	-8.6	68.6	10.97	64.2	-0.25	2.57
32	-9.9	-8.5	68.6	11.10	64.6	-0.21	2.64
33	-10.0	-8.6	68.8	11.13	64.7	-0.22	2.62


Averages:

30	-10.0	-8.6	68.5	11.40	65.5	-0.24	2.59
----	-------	-------------	------	-------	------	-------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

DRY_E410

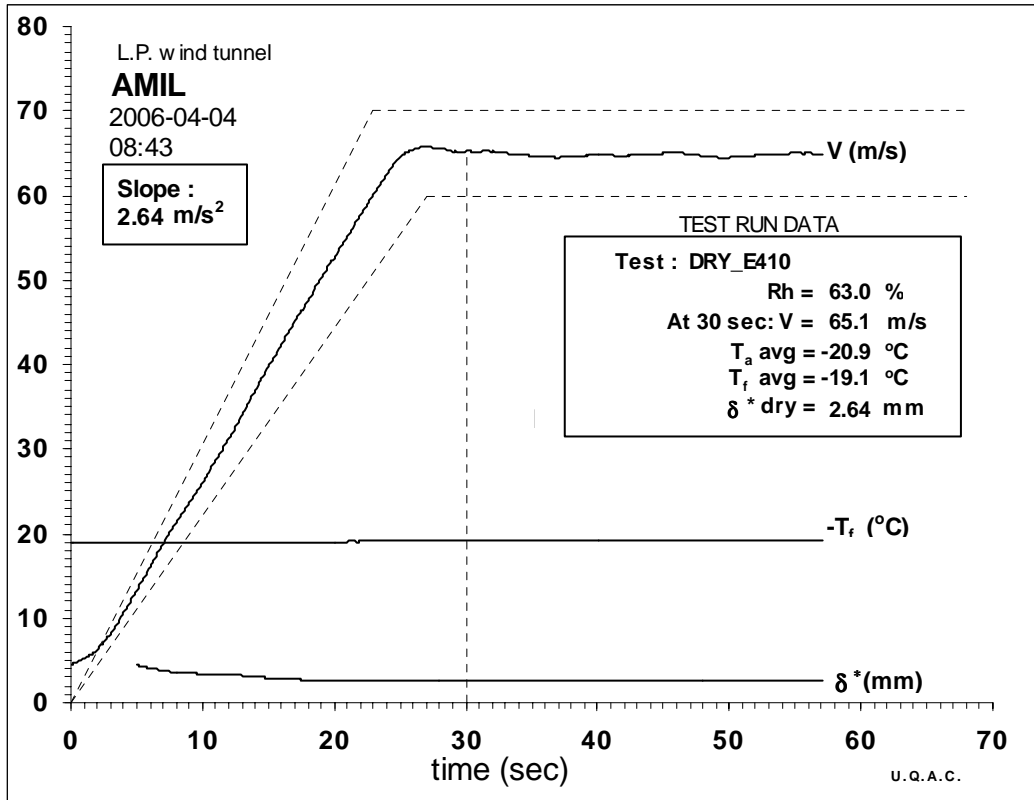

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-21.1	-19.1	62.8	12.03	65.8	-0.23	2.63
28	-21.1	-19.1	62.7	11.64	64.7	-0.22	2.64
29	-21.1	-19.2	62.9	11.66	64.8	-0.22	2.63
30	-21.1	-19.1	62.8	11.85	65.3	-0.18	2.70
31	-21.0	-19.2	62.8	12.04	65.9	-0.25	2.60
32	-21.1	-19.2	62.6	11.61	64.7	-0.22	2.64
33	-21.1	-19.1	62.9	11.65	64.8	-0.24	2.60


Averages:

30	-21.1	-19.1	62.8	11.77	65.1	-0.22	2.64
----	-------	--------------	------	-------	------	-------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

DRY_E411

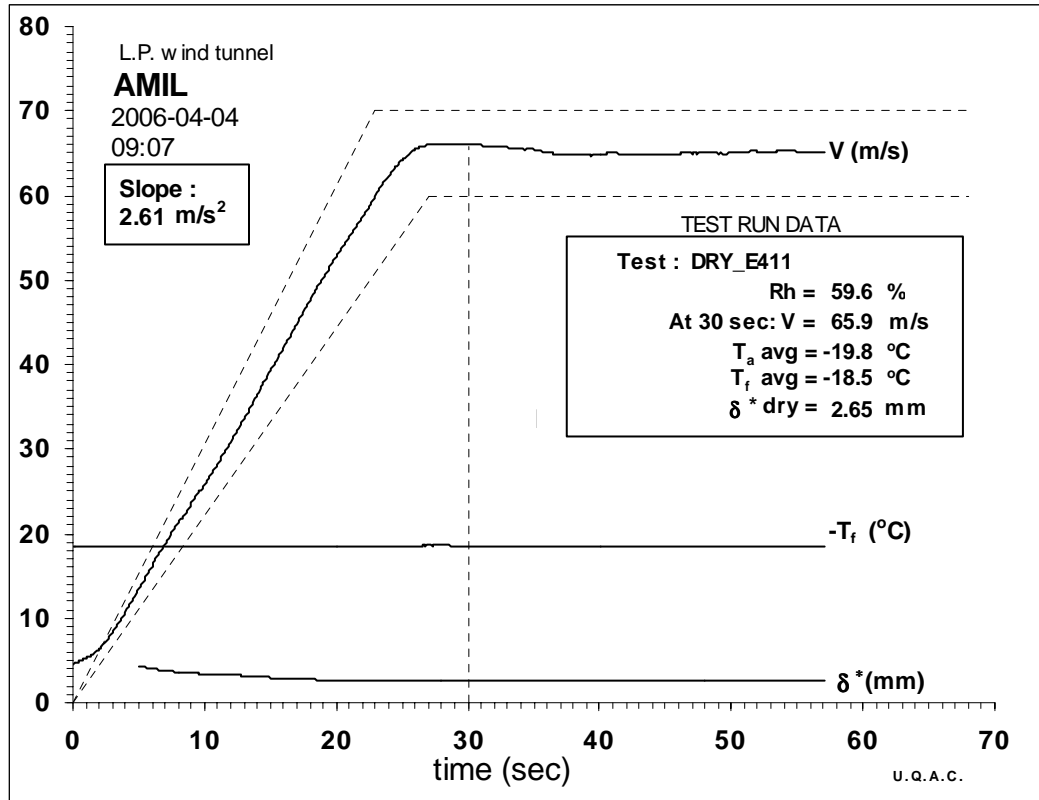

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-20.0	-18.6	59.2	12.12	66.2	-0.20	2.68
28	-19.9	-18.6	59.4	12.00	65.9	-0.21	2.66
29	-20.0	-18.6	59.2	12.12	66.2	-0.23	2.63
30	-19.9	-18.6	59.6	12.01	65.9	-0.22	2.64
31	-20.0	-18.6	59.5	11.98	65.8	-0.22	2.65
32	-19.9	-18.5	59.8	12.00	65.9	-0.21	2.66
33	-19.9	-18.6	59.6	11.89	65.6	-0.20	2.67


Averages:

30	-19.9	-18.6	59.5	12.02	65.9	-0.22	2.65
----	-------	--------------	------	-------	------	-------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

DRY_E412

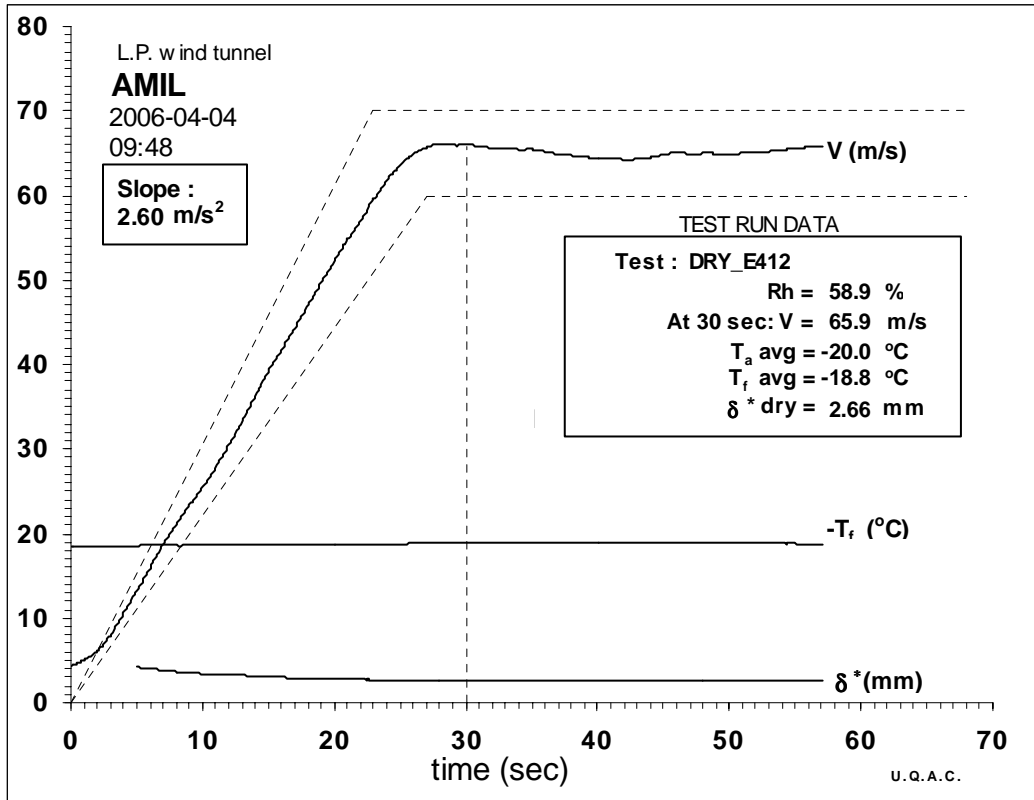

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-20.2	-18.9	58.4	12.05	66.0	-0.18	2.72
28	-20.2	-18.9	58.3	11.92	65.6	-0.22	2.65
29	-20.2	-18.9	58.6	12.19	66.4	-0.19	2.70
30	-20.2	-18.9	58.5	12.08	66.1	-0.22	2.65
31	-20.2	-18.9	58.6	11.92	65.6	-0.24	2.61
32	-20.2	-18.9	58.6	12.01	65.9	-0.22	2.64
33	-20.2	-18.9	58.6	11.75	65.2	-0.21	2.65


Averages:

30	-20.2	-18.9	58.5	12.00	65.9	-0.21	2.66
----	-------	--------------	------	-------	------	-------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

DRY_F415

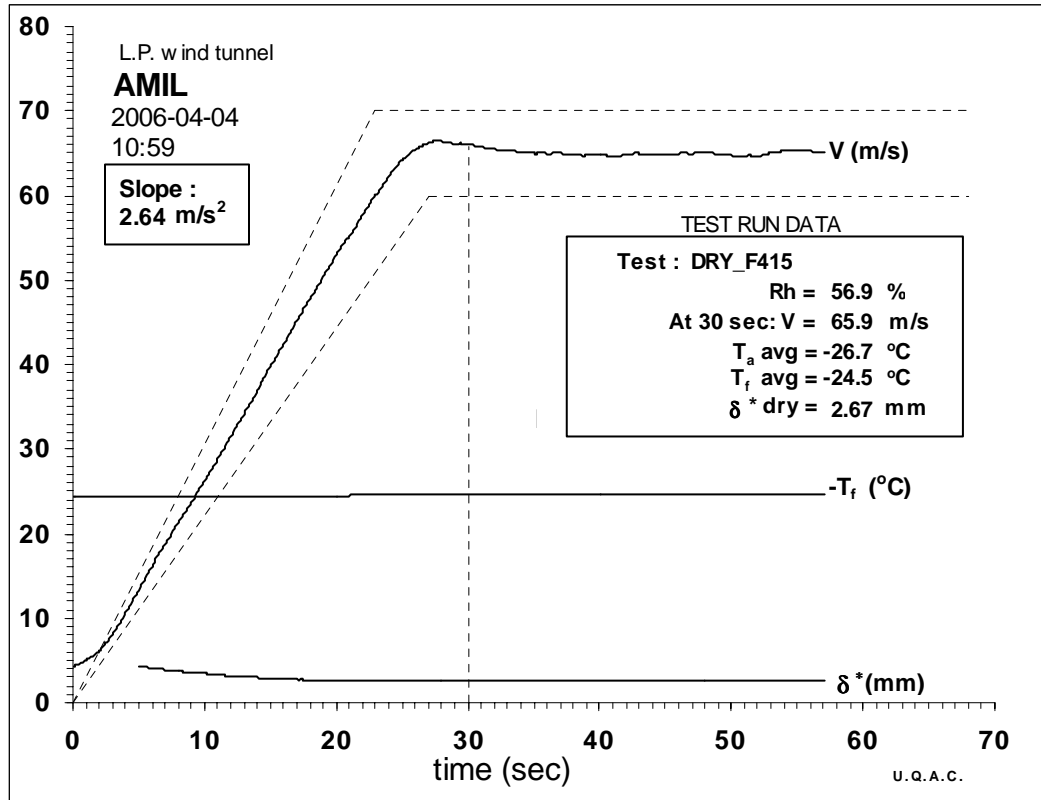

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-26.9	-24.6	56.6	12.28	65.7	-0.23	2.64
28	-26.8	-24.6	56.6	12.55	66.5	-0.24	2.64
29	-26.9	-24.6	56.8	12.56	66.5	-0.21	2.68
30	-26.9	-24.6	56.7	12.39	66.0	-0.22	2.66
31	-26.8	-24.6	56.8	12.26	65.7	-0.18	2.71
32	-26.9	-24.6	56.9	12.17	65.4	-0.22	2.65
33	-26.9	-24.6	57.2	12.20	65.5	-0.18	2.72


Averages:

30	-26.9	-24.6	56.8	12.36	65.9	-0.21	2.67
----	-------	--------------	------	-------	------	-------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

DRY_F416

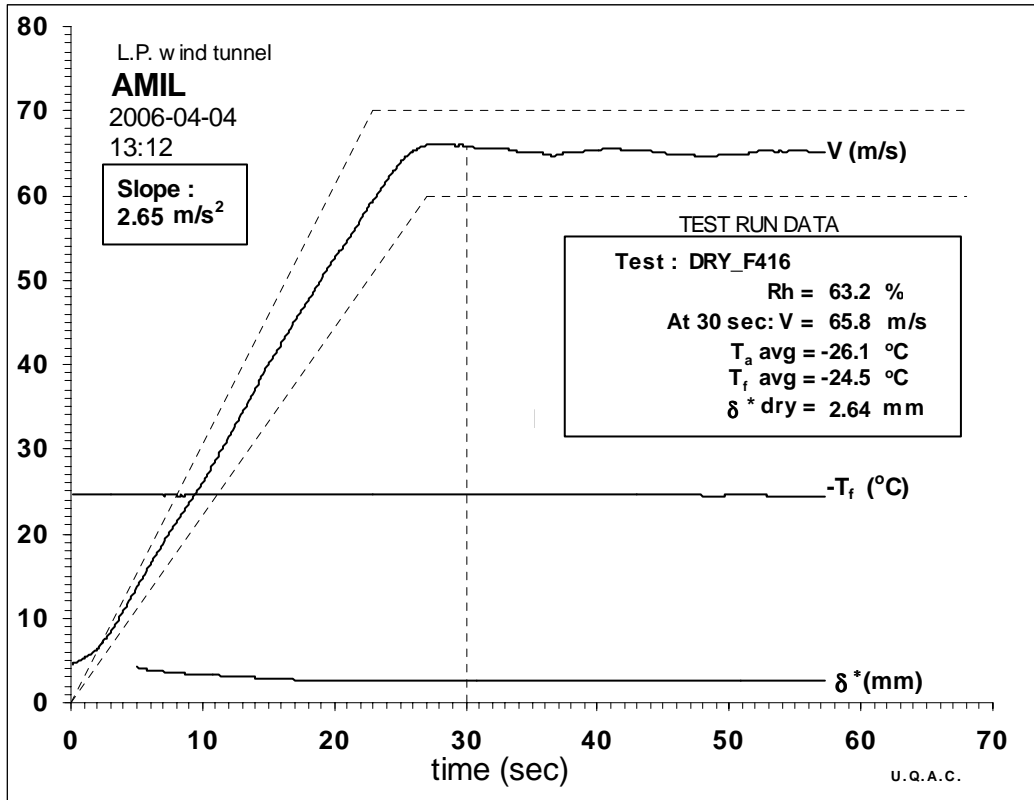

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-26.2	-24.6	63.2	12.54	66.5	-0.25	2.61
28	-26.2	-24.6	63.1	12.53	66.5	-0.21	2.68
29	-26.2	-24.6	63.0	12.31	65.9	-0.24	2.62
30	-26.2	-24.6	63.0	12.16	65.5	-0.23	2.64
31	-26.2	-24.6	63.1	12.23	65.7	-0.25	2.60
32	-26.2	-24.5	63.1	12.30	65.9	-0.20	2.68
33	-26.1	-24.6	62.7	11.89	64.8	-0.24	2.61


Averages:

30	-26.2	-24.6	63.0	12.28	65.8	-0.23	2.64
----	-------	--------------	------	-------	------	-------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

DRY_F417

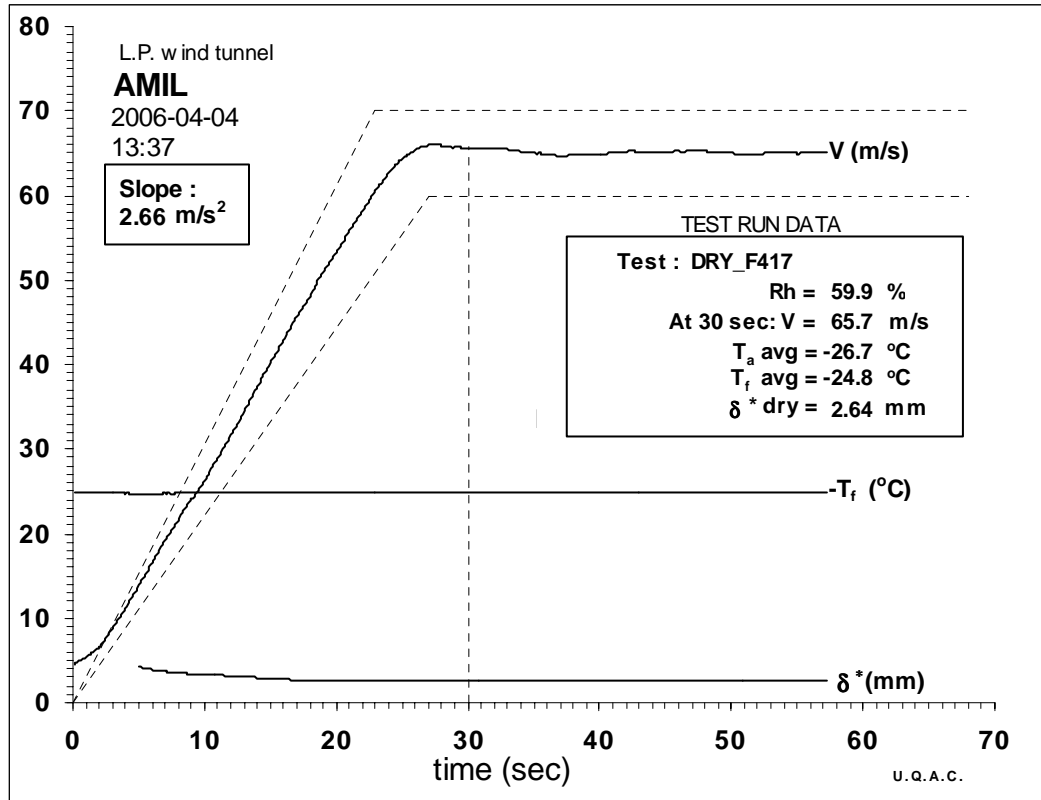

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-26.8	-24.9	59.7	12.21	65.6	-0.27	2.58
28	-26.8	-24.9	59.7	12.53	66.4	-0.22	2.65
29	-26.8	-24.9	59.9	12.20	65.5	-0.20	2.68
30	-26.7	-24.8	59.6	12.11	65.3	-0.22	2.65
31	-26.8	-24.9	59.7	12.17	65.5	-0.24	2.61
32	-26.8	-24.9	60.0	12.30	65.8	-0.22	2.65
33	-26.8	-24.9	60.0	12.30	65.8	-0.21	2.67


Averages:

30	-26.8	-24.9	59.8	12.26	65.7	-0.23	2.64
----	-------	--------------	------	-------	------	-------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

DRY_H421

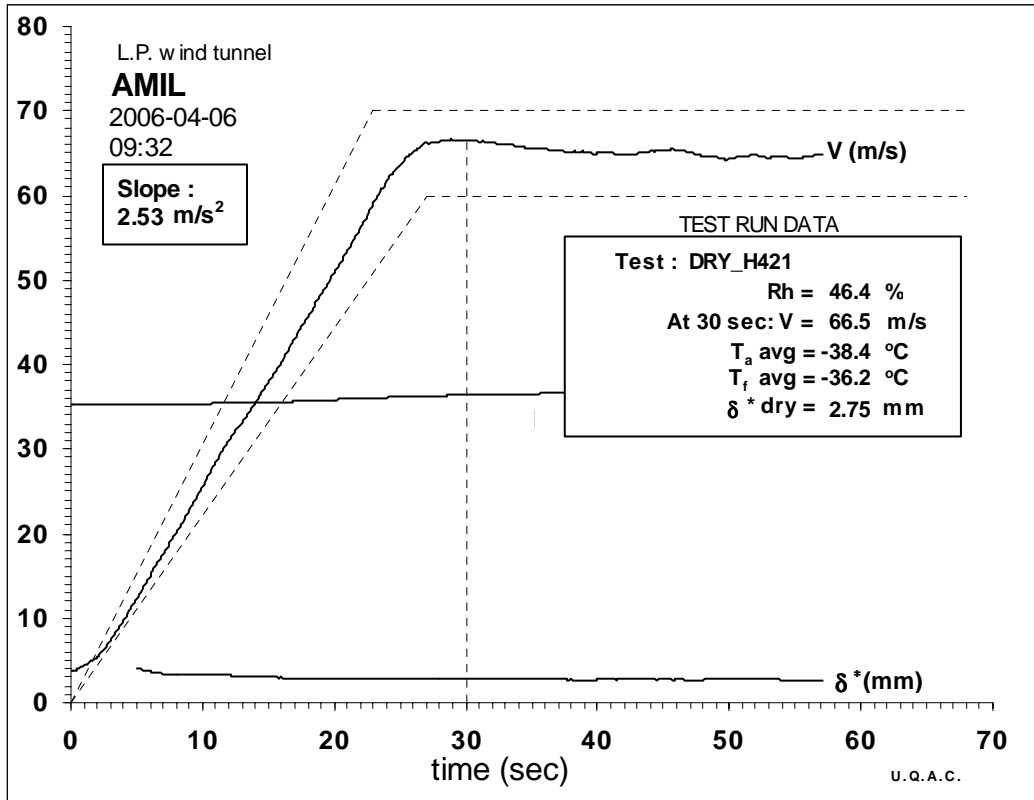

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-38.8	-36.4	46.3	13.33	66.8	-0.16	2.77
28	-38.9	-36.3	46.1	13.19	66.4	-0.17	2.74
29	-38.9	-36.3	46.2	13.25	66.6	-0.18	2.73
30	-39.0	-36.4	46.5	13.40	67.0	-0.16	2.77
31	-39.0	-36.5	46.5	13.11	66.2	-0.15	2.78
32	-39.0	-36.4	46.3	13.15	66.3	-0.18	2.73
33	-39.0	-36.5	46.4	13.12	66.3	-0.17	2.75


Averages:

30	-39.0	-36.4	46.3	13.22	66.5	-0.17	2.75
----	-------	--------------	------	-------	------	-------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

DRY_H422

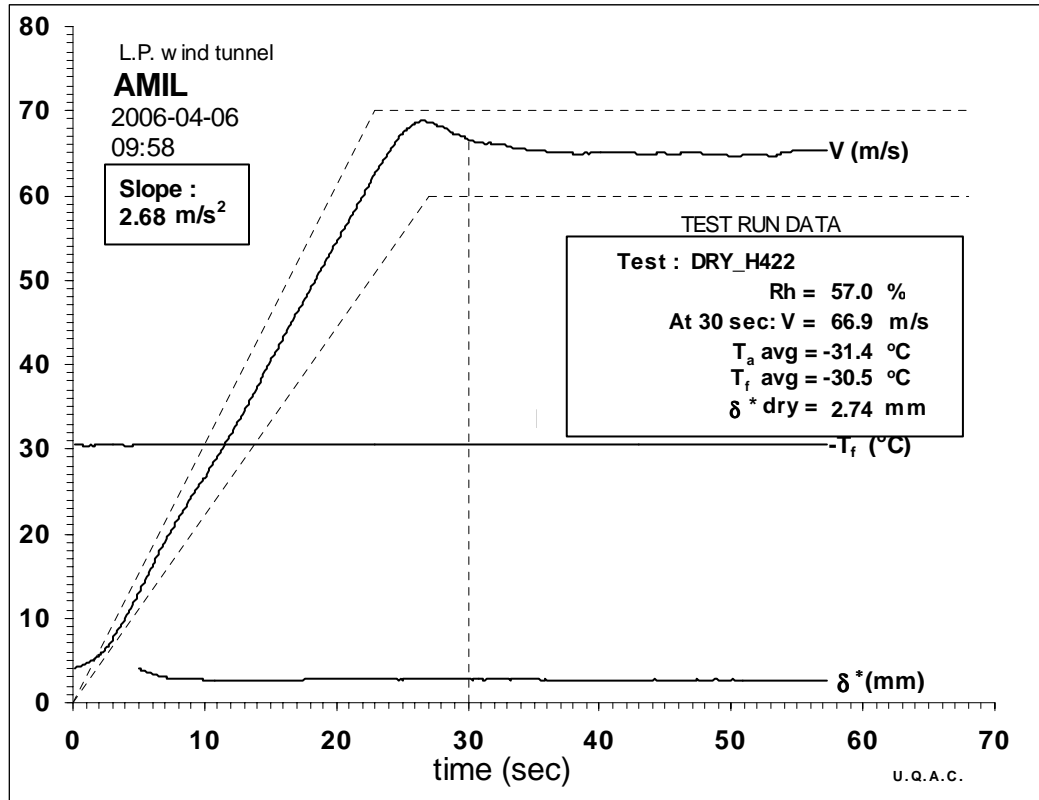

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ * mm
27	-31.4	-30.6	57.0	13.74	68.9	-0.12	2.83
28	-31.6	-30.5	56.7	13.69	68.7	-0.17	2.75
29	-31.5	-30.6	56.8	12.82	66.5	-0.19	2.72
30	-31.5	-30.6	57.1	12.85	66.6	-0.18	2.72
31	-31.4	-30.5	57.1	12.70	66.2	-0.17	2.73
32	-31.5	-30.5	57.0	12.71	66.2	-0.18	2.73
33	-31.5	-30.5	56.9	12.40	65.4	-0.17	2.73


Averages:

30	-31.5	-30.6	56.9	12.96	66.9	-0.17	2.74
----	-------	-------	------	-------	------	-------	------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

DRY_H423

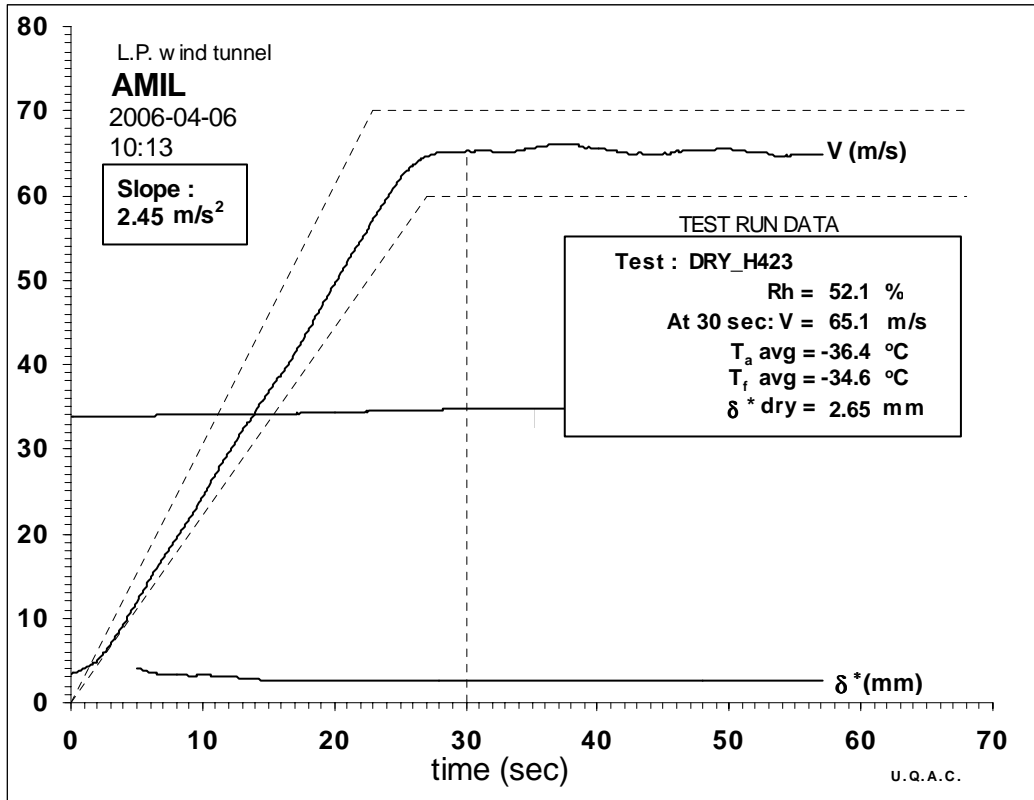

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-36.8	-34.7	52.4	12.85	65.9	-0.19	2.72
28	-36.8	-34.7	52.1	12.33	64.5	-0.22	2.66
29	-36.9	-34.7	52.1	12.47	64.9	-0.22	2.65
30	-36.8	-34.7	51.9	12.70	65.5	-0.22	2.67
31	-36.8	-34.7	52.1	12.68	65.4	-0.25	2.62
32	-36.9	-34.7	52.0	12.46	64.8	-0.23	2.65
33	-36.9	-34.7	52.2	12.71	65.5	-0.25	2.62


Averages:

30	-36.8	-34.7	52.1	12.57	65.1	-0.23	2.65
----	-------	--------------	------	-------	------	-------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

DRY_H424

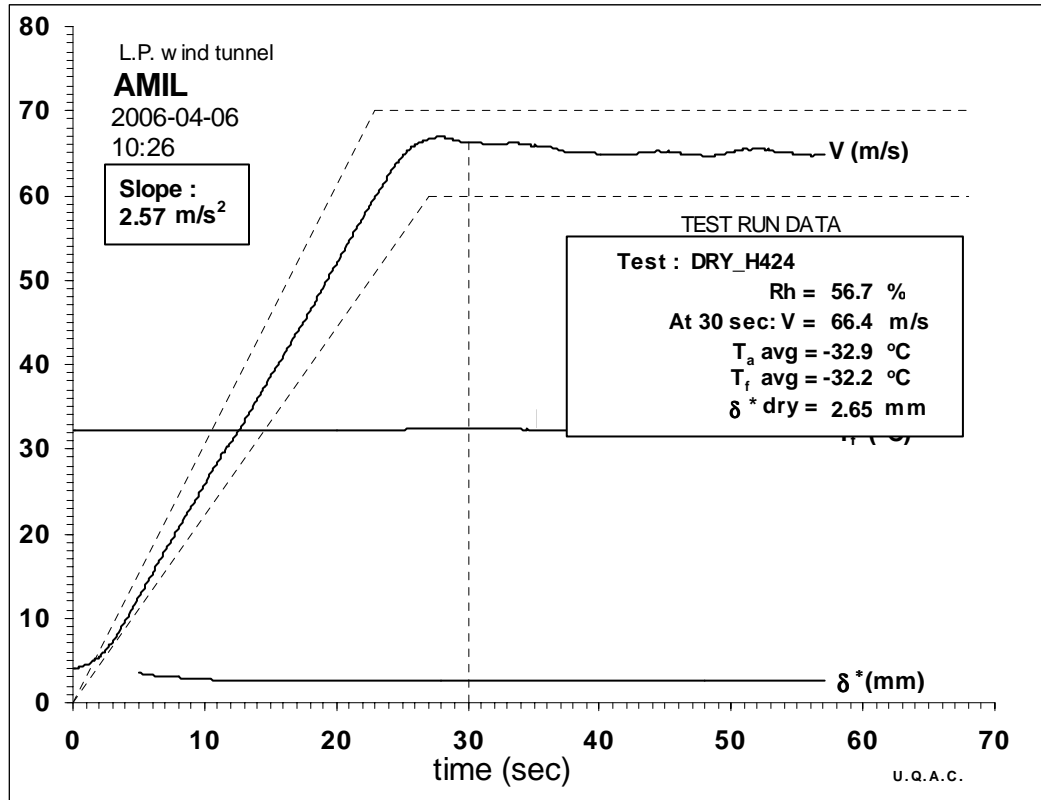

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-33.1	-32.3	56.8	13.38	67.8	-0.22	2.68
28	-33.0	-32.3	56.4	12.86	66.4	-0.21	2.68
29	-33.0	-32.3	56.7	12.90	66.5	-0.20	2.69
30	-33.0	-32.3	56.6	12.98	66.7	-0.23	2.65
31	-33.0	-32.3	56.5	12.47	65.4	-0.27	2.59
32	-33.0	-32.3	56.5	12.85	66.4	-0.25	2.62
33	-33.0	-32.3	56.4	12.63	65.8	-0.22	2.66


Averages:

30	-33.0	-32.3	56.5	12.84	66.4	-0.23	2.65
----	-------	--------------	------	-------	------	-------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

DRY_H425

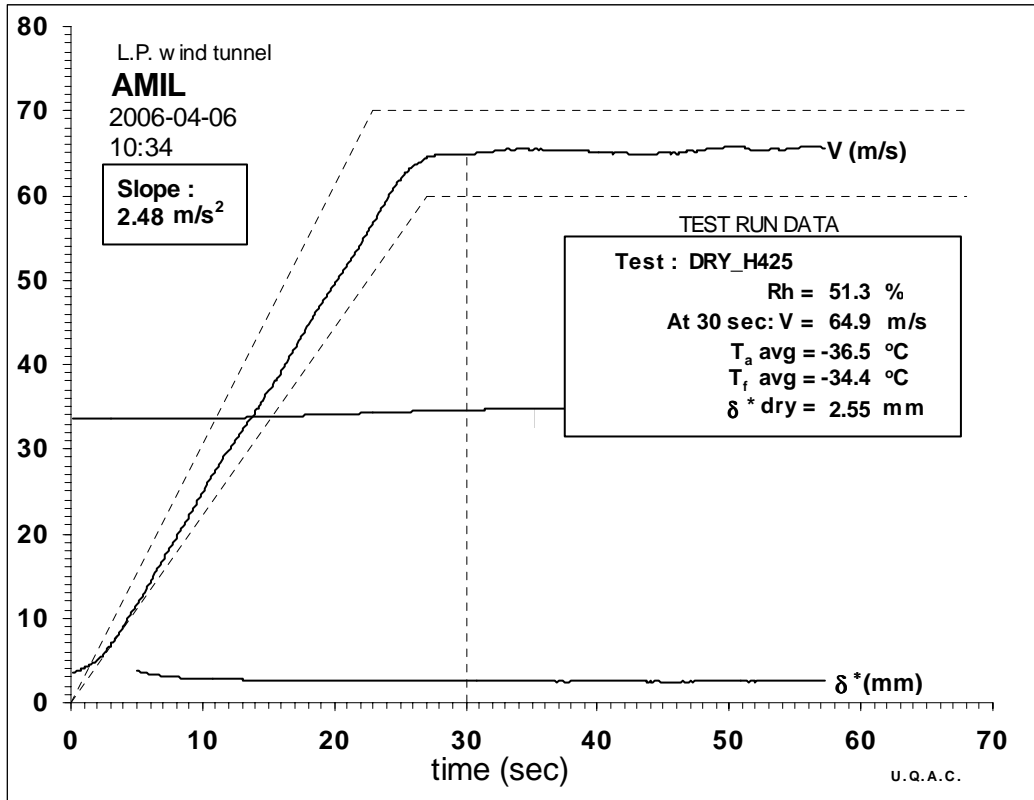

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-37.0	-34.5	51.7	12.56	65.1	-0.32	2.50
28	-37.0	-34.6	51.3	12.30	64.4	-0.28	2.55
29	-37.1	-34.6	51.5	12.46	64.8	-0.24	2.63
30	-37.1	-34.6	51.5	12.51	65.0	-0.31	2.52
31	-37.1	-34.6	51.4	12.49	64.9	-0.29	2.55
32	-37.1	-34.7	51.3	12.46	64.8	-0.28	2.57
33	-37.2	-34.7	51.3	12.92	66.0	-0.33	2.51


Averages:

30	-37.1	-34.6	51.4	12.50	64.9	-0.29	2.55
----	-------	--------------	------	-------	------	-------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

DRY_H426

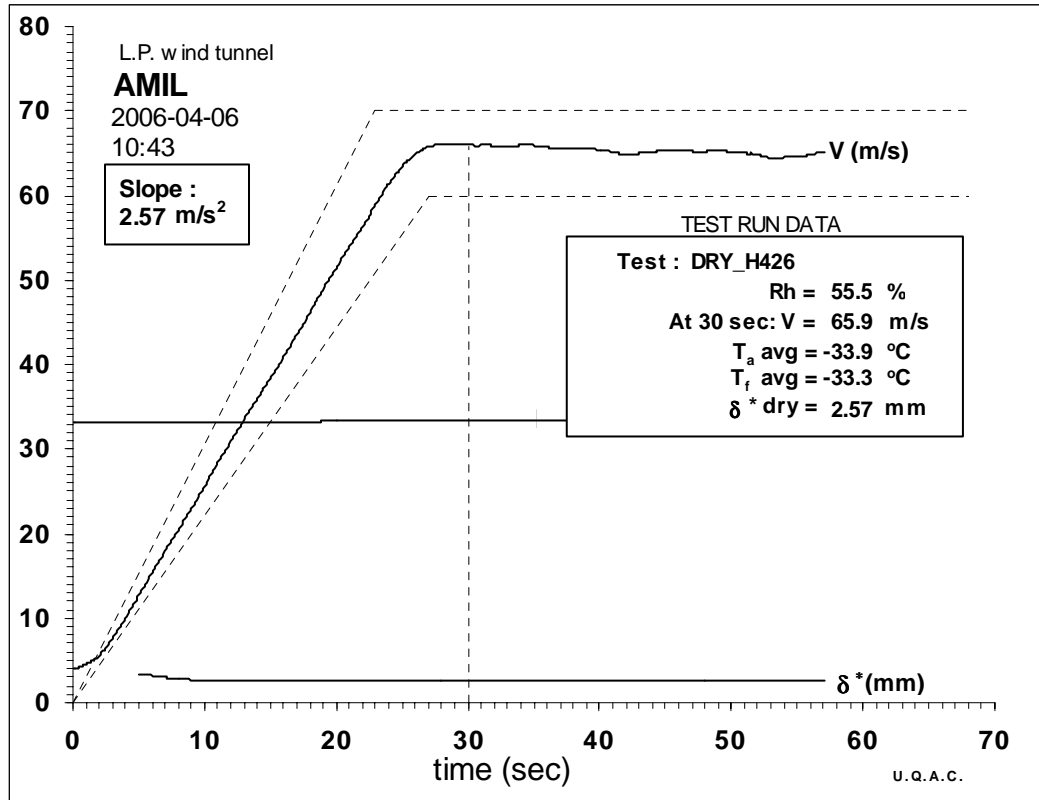

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-34.2	-33.4	55.1	12.83	66.2	-0.31	2.52
28	-34.2	-33.3	55.4	12.49	65.3	-0.25	2.60
29	-34.2	-33.4	55.3	12.87	66.3	-0.28	2.58
30	-34.1	-33.3	55.3	12.89	66.4	-0.25	2.63
31	-34.2	-33.4	55.4	12.77	66.0	-0.29	2.55
32	-34.2	-33.4	55.6	12.36	65.0	-0.32	2.50
33	-34.1	-33.4	55.5	12.91	66.4	-0.26	2.61

Averages:

30	-34.2	-33.4	55.4	12.71	65.9	-0.28	2.57
----	-------	--------------	------	-------	------	-------	-------------


Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

This page left blank.

RUNS WITH REFERENCE FLUID M-037

M037A375

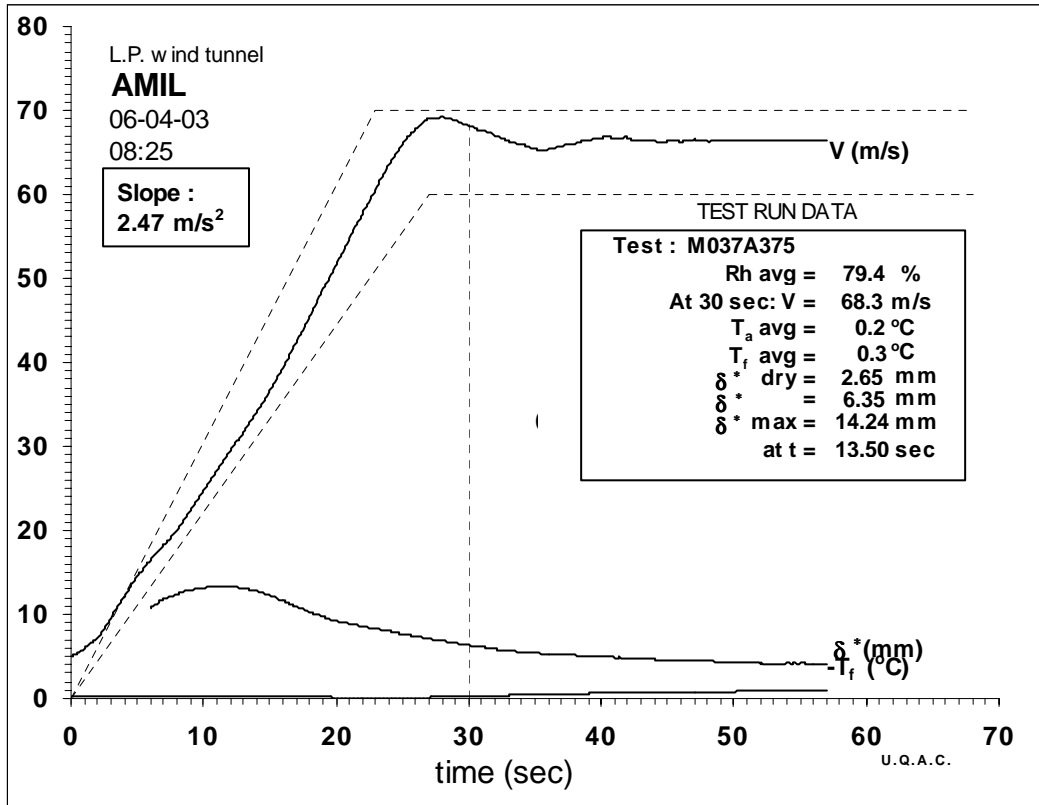

CRITICAL TIME TEST DATA

time Sec	T_a °C	T_f °C	Rh %	P_1-P_2 "H ₂ O	V m/s	P_2-P_3 "H ₂ O	δ^* mm
27	-0.1	0.1	79.2	12.65	70.3	0.93	7.14
28	0.0	0.2	79.3	12.30	69.3	0.83	6.87
29	0.0	0.2	79.5	12.13	68.8	0.72	6.49
30	0.2	0.2	79.7	11.95	68.3	0.70	6.44
31	0.1	0.2	80.0	11.60	67.3	0.58	6.06
32	0.1	0.4	80.1	11.55	67.2	0.54	5.87
33	0.1	0.3	80.2	11.59	67.3	0.51	5.75


Averages :

30	0.1	0.2	79.7	11.94	68.3	0.68	6.35
----	-----	------------	------	-------	------	------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

M037A376

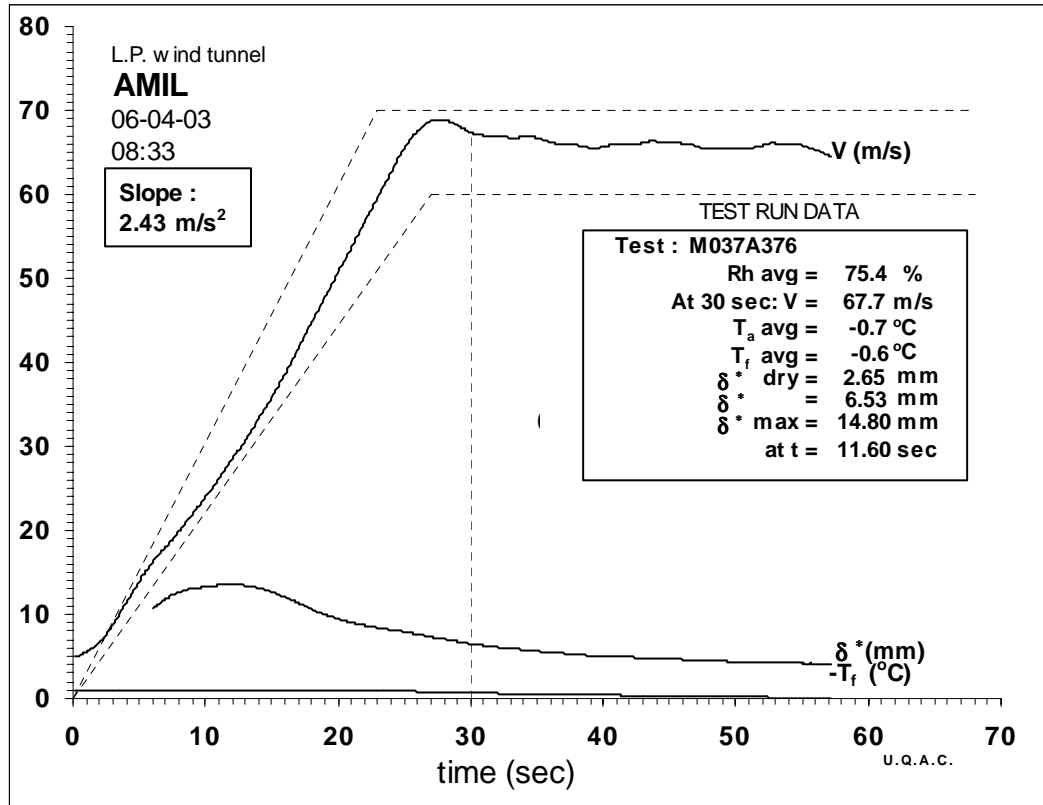

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-1.0	-0.8	73.5	12.58	70.0	0.98	7.35
28	-1.0	-0.7	74.1	12.26	69.0	0.84	6.91
29	-1.0	-0.7	73.9	11.98	68.2	0.79	6.80
30	-0.9	-0.7	74.4	11.77	67.7	0.76	6.70
31	-0.9	-0.6	74.4	11.23	66.1	0.58	6.12
32	-0.9	-0.5	74.4	11.37	66.5	0.56	5.99
33	-0.9	-0.6	74.8	11.86	67.9	0.60	6.07


Averages :

30	-0.9	-0.7	74.2	11.80	67.7	0.72	6.53
----	------	-------------	------	-------	------	------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

M037A377

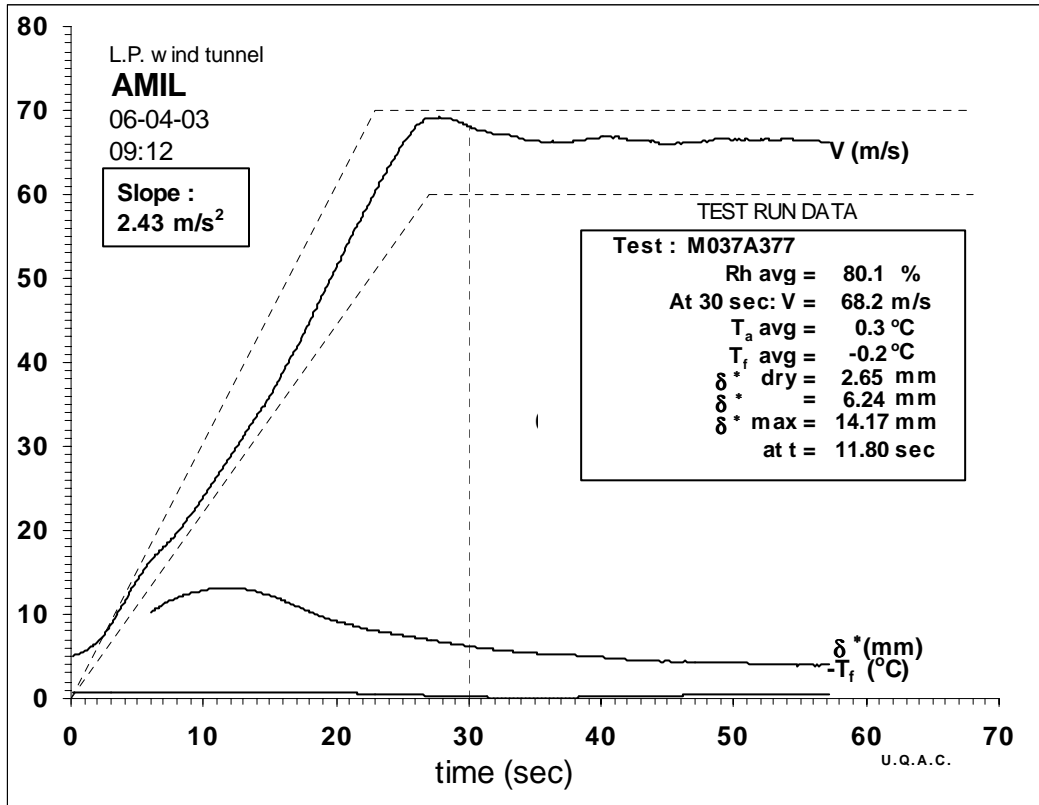

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	0.2	-0.3	79.6	12.52	69.9	0.88	7.00
28	0.2	-0.3	80.0	12.40	69.6	0.79	6.68
29	0.2	-0.2	80.2	11.95	68.3	0.70	6.46
30	0.2	-0.2	80.2	11.91	68.2	0.65	6.27
31	0.2	-0.2	80.3	11.76	67.8	0.59	6.05
32	0.3	-0.1	80.7	11.53	67.1	0.48	5.66
33	0.3	-0.1	80.5	11.40	66.7	0.50	5.77


Averages :

30	0.2	-0.2	80.2	11.91	68.2	0.65	6.24
----	-----	-------------	------	-------	------	------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

M037C378

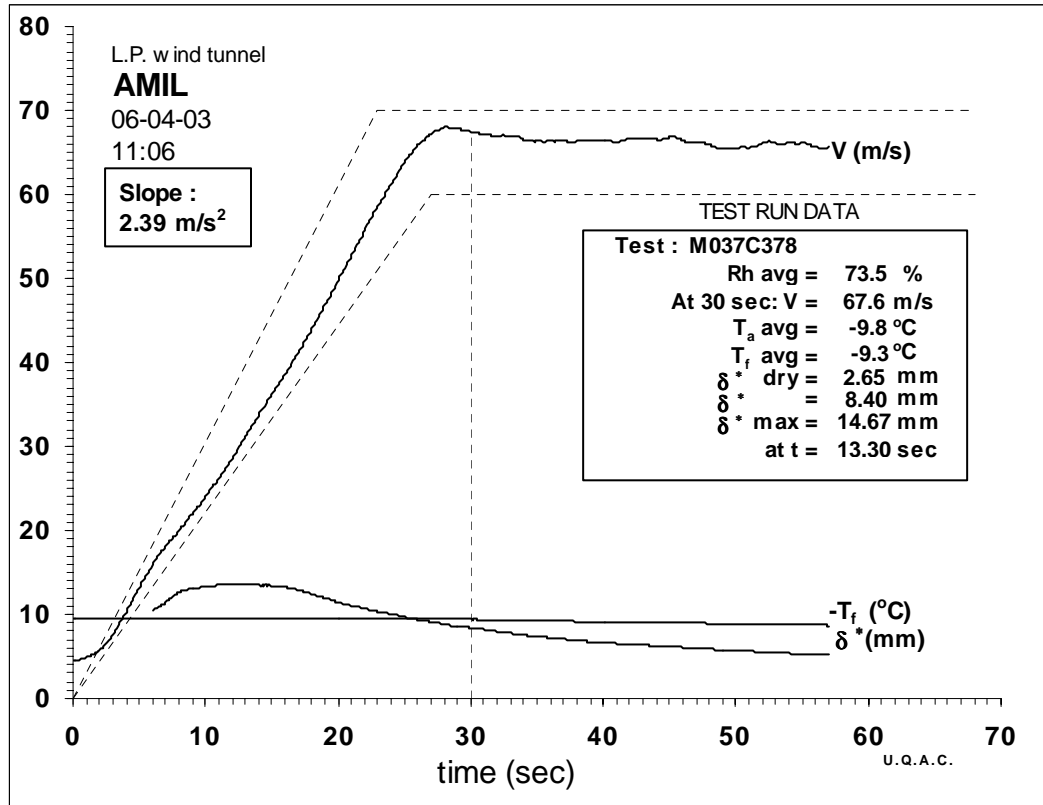

CRITICAL TIME TEST DATA

time Sec	T_a °C	T_f °C	Rh %	P_1-P_2 "H ₂ O	V m/s	P_2-P_3 "H ₂ O	δ^* mm
27	-9.9	-9.4	71.8	12.77	69.3	1.45	8.92
28	-10.0	-9.5	72.1	12.34	68.1	1.36	8.77
29	-9.9	-9.5	72.3	12.29	68.0	1.31	8.61
30	-9.9	-9.4	72.2	11.98	67.1	1.23	8.45
31	-9.9	-9.4	72.4	12.05	67.3	1.17	8.19
32	-9.9	-9.4	72.9	11.90	66.9	1.12	8.07
33	-9.9	-9.3	72.9	11.96	67.1	1.07	7.85


Averages :

30	-9.9	-9.4	72.4	12.15	67.6	1.24	8.40
----	------	-------------	------	-------	------	------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

M037C379

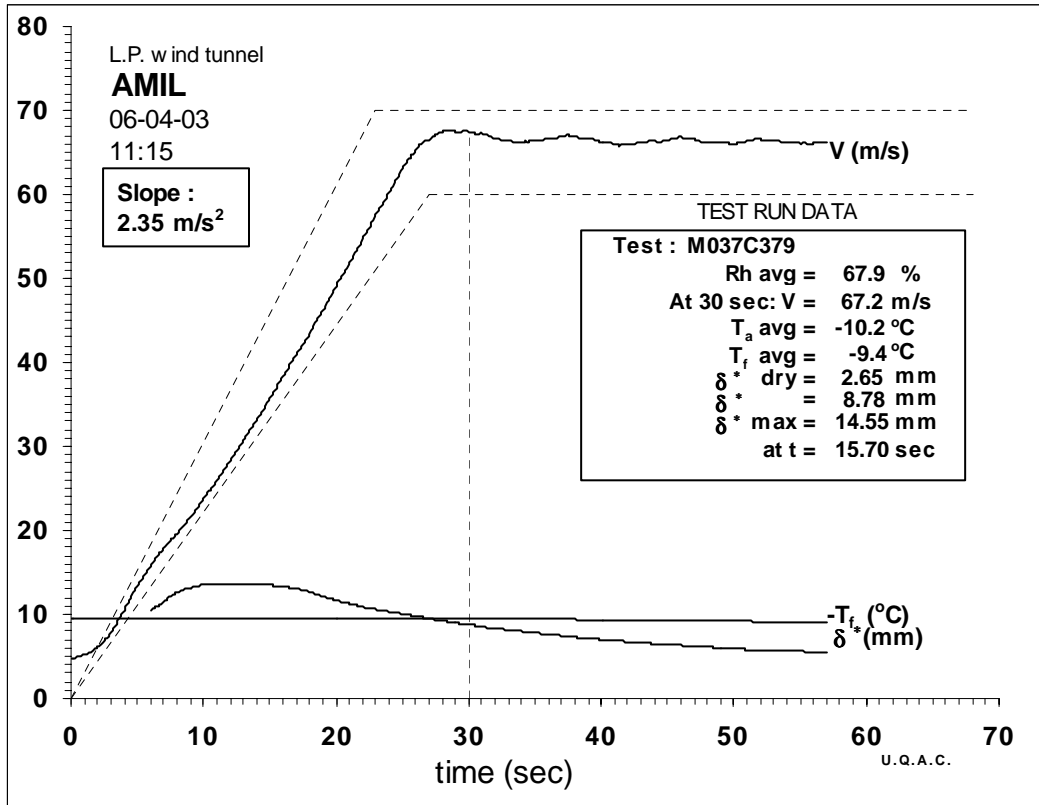

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-10.5	-9.5	66.1	11.92	66.9	1.51	9.51
28	-10.6	-9.5	66.4	12.18	67.6	1.47	9.23
29	-10.5	-9.5	66.2	12.00	67.1	1.38	8.98
30	-10.5	-9.5	66.8	12.43	68.3	1.38	8.83
31	-10.5	-9.5	66.7	11.91	66.9	1.24	8.49
32	-10.4	-9.5	67.1	11.92	66.9	1.22	8.42
33	-10.4	-9.4	66.8	11.68	66.2	1.11	8.09


Averages :

30	-10.5	-9.5	66.6	12.03	67.2	1.33	8.78
----	-------	-------------	------	-------	------	------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

M037C380

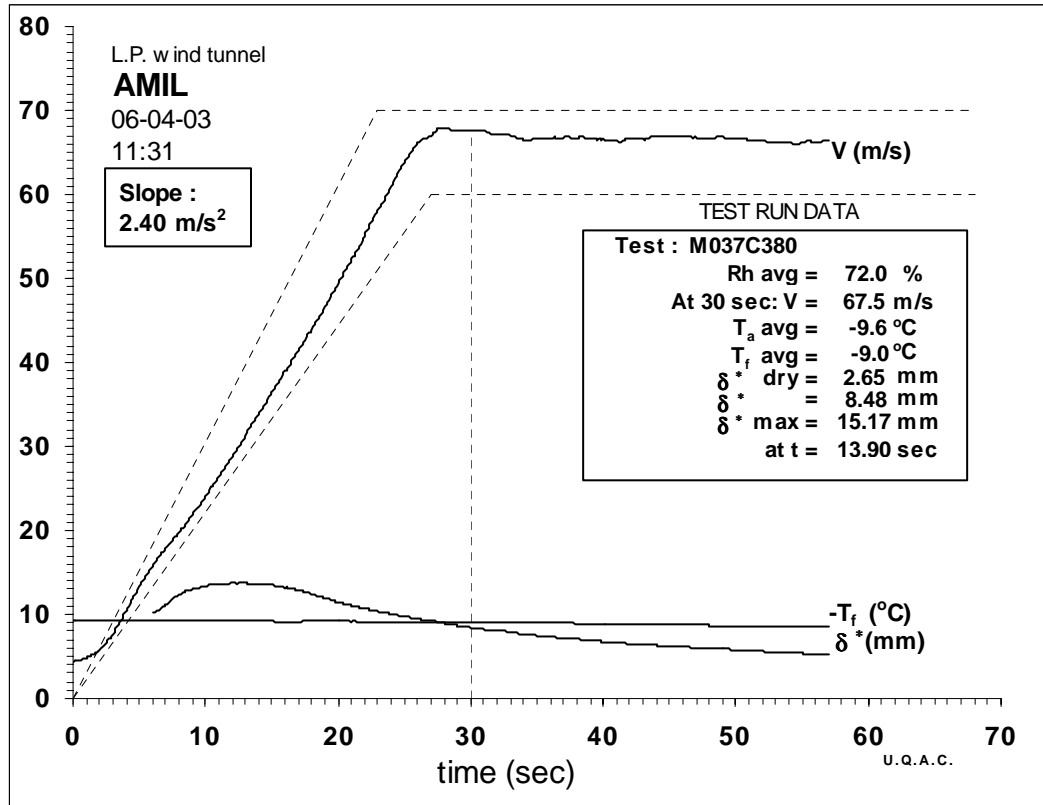

CRITICAL TIME TEST DATA

time Sec	T_a °C	T_f °C	Rh %	P_1-P_2 "H ₂ O	V m/s	P_2-P_3 "H ₂ O	δ^* mm
27	-9.9	-9.1	70.8	11.98	67.1	1.45	9.23
28	-9.9	-9.1	70.4	12.25	67.9	1.40	8.95
29	-9.9	-9.1	70.6	12.17	67.7	1.35	8.81
30	-9.8	-9.1	70.8	11.96	67.1	1.17	8.21
31	-9.8	-9.0	71.2	12.27	68.0	1.22	8.31
32	-9.7	-9.1	71.3	12.27	68.0	1.15	8.05
33	-9.8	-9.0	71.2	11.61	66.1	1.06	7.95


Averages :

30	-9.8	-9.1	70.9	12.11	67.5	1.25	8.48
----	------	-------------	------	-------	------	------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

M037E381

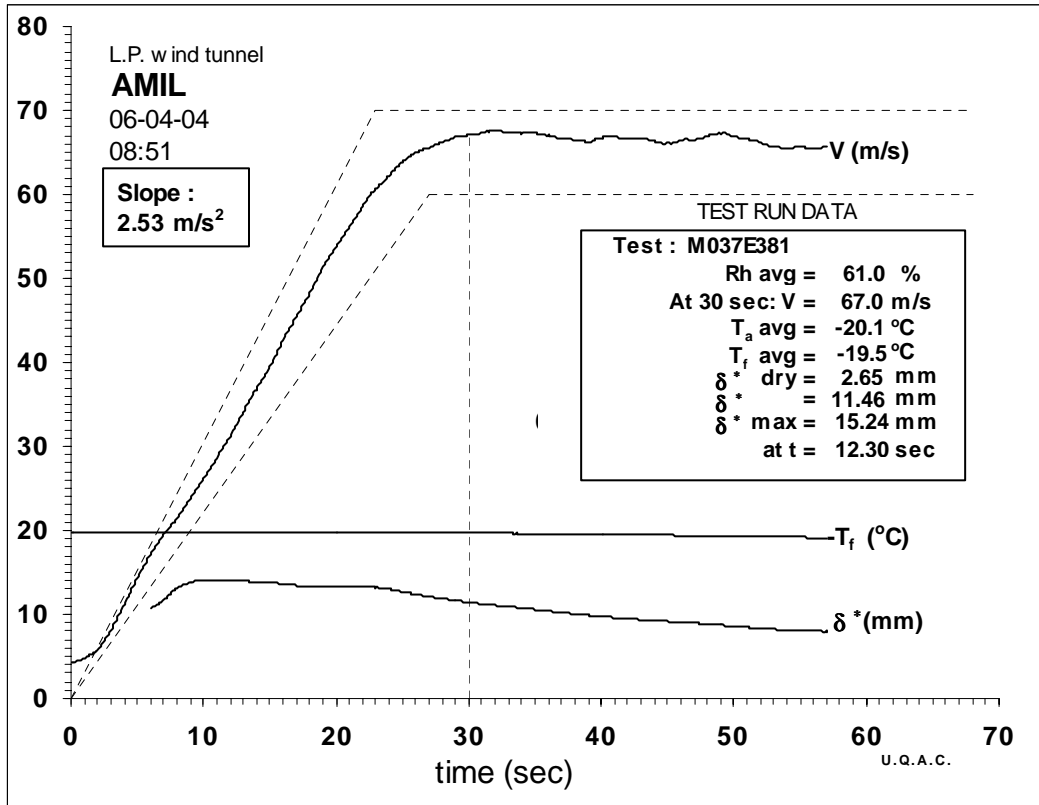

CRITICAL TIME TEST DATA

time Sec	T_a $^\circ\text{C}$	T_f $^\circ\text{C}$	Rh %	P_1-P_2 "H ₂ O	V m/s	P_2-P_3 "H ₂ O	δ^* mm
27	-20.4	-19.7	60.1	12.08	66.0	2.25	11.95
28	-20.4	-19.7	60.2	12.31	66.7	2.29	11.93
29	-20.4	-19.7	60.3	12.02	65.9	2.14	11.62
30	-20.3	-19.7	60.1	12.60	67.5	2.21	11.50
31	-20.3	-19.7	60.2	12.77	67.9	2.13	11.15
32	-20.2	-19.7	60.5	12.56	67.4	2.08	11.10
33	-20.1	-19.7	60.4	12.47	67.1	2.04	11.03


Averages :

30	-20.3	-19.7	60.3	12.42	67.0	2.16	11.46
----	-------	--------------	------	-------	------	------	--------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

M037E382

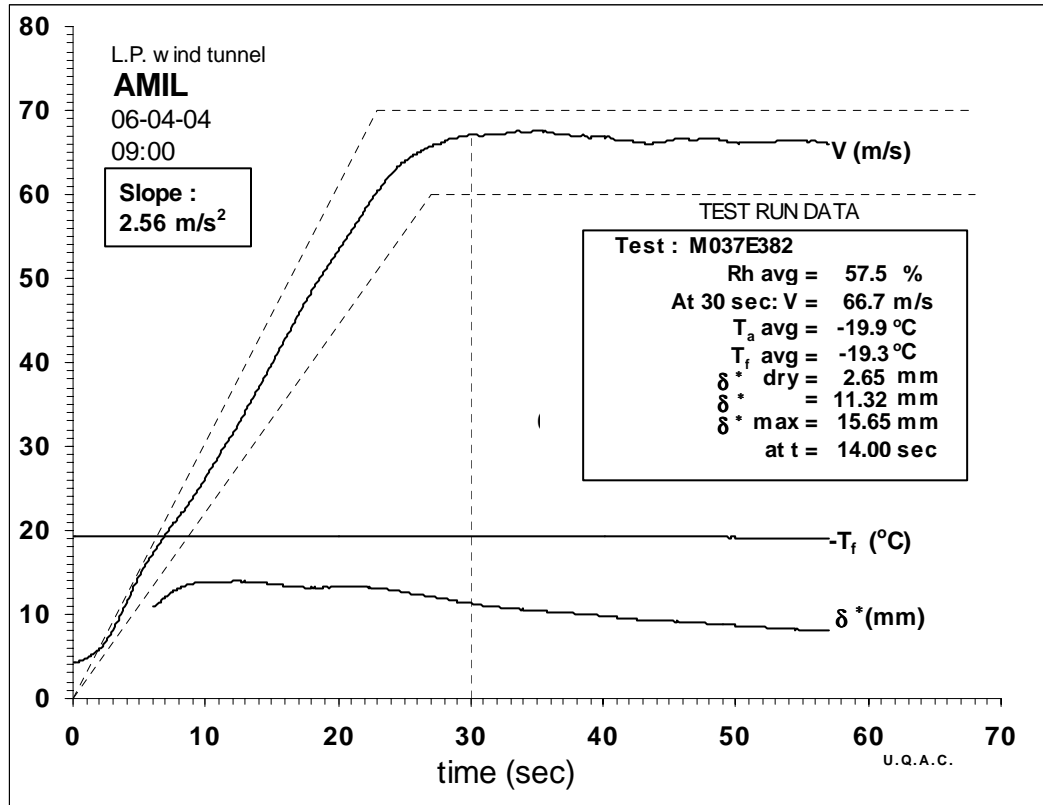

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-20.3	-19.4	56.7	11.81	65.3	2.24	12.06
28	-20.2	-19.4	56.8	12.32	66.7	2.30	11.94
29	-20.2	-19.4	56.9	12.09	66.1	2.13	11.54
30	-20.2	-19.4	57.1	12.61	67.5	2.13	11.22
31	-20.2	-19.4	57.1	12.48	67.2	2.03	11.01
32	-20.1	-19.4	56.9	12.65	67.6	2.02	10.88
33	-20.1	-19.4	57.3	11.89	65.6	1.85	10.68


Averages :

30	-20.2	-19.4	57.0	12.33	66.7	2.11	11.32
----	-------	--------------	------	-------	------	------	--------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

M037E383

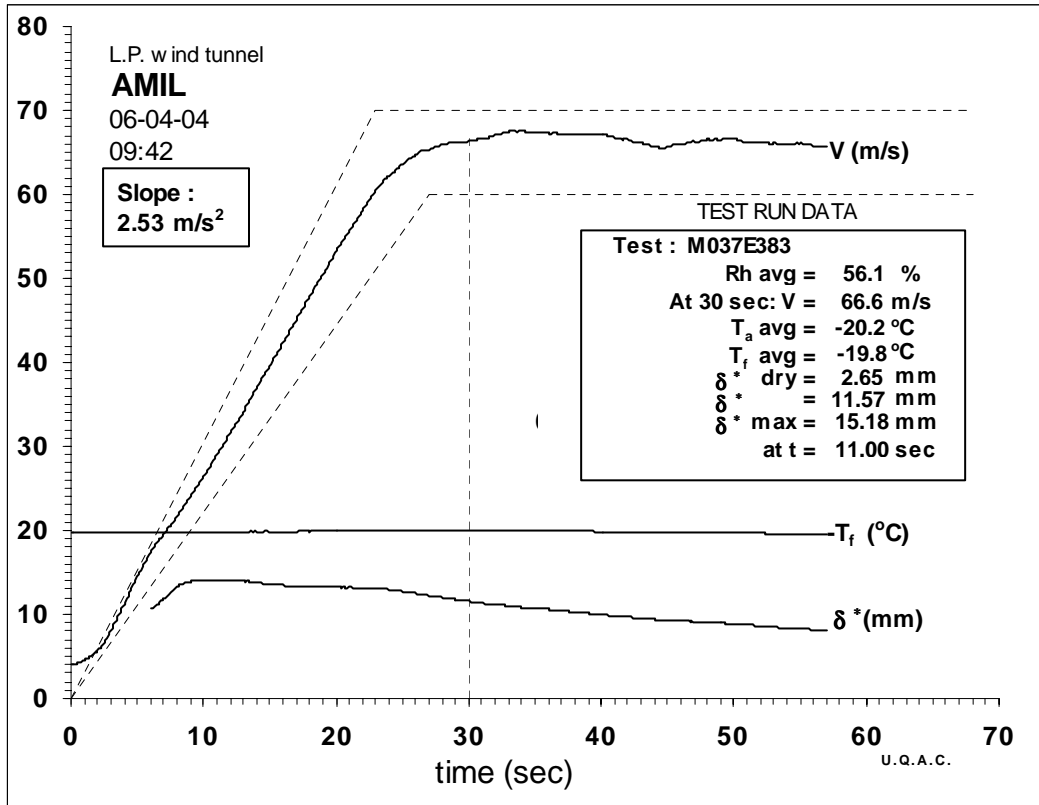

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-20.6	-19.9	55.4	11.94	65.6	2.32	12.24
28	-20.6	-19.9	55.3	12.36	66.8	2.33	12.01
29	-20.6	-19.9	55.2	12.08	66.0	2.21	11.80
30	-20.5	-19.9	55.6	12.08	66.0	2.12	11.49
31	-20.5	-19.9	55.3	12.15	66.2	2.10	11.39
32	-20.4	-20.0	55.6	12.47	67.1	2.09	11.18
33	-20.4	-19.9	55.5	12.92	68.3	2.11	11.01


Averages :

30	-20.5	-19.9	55.4	12.27	66.6	2.17	11.57
----	-------	--------------	------	-------	------	------	--------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

M037F384

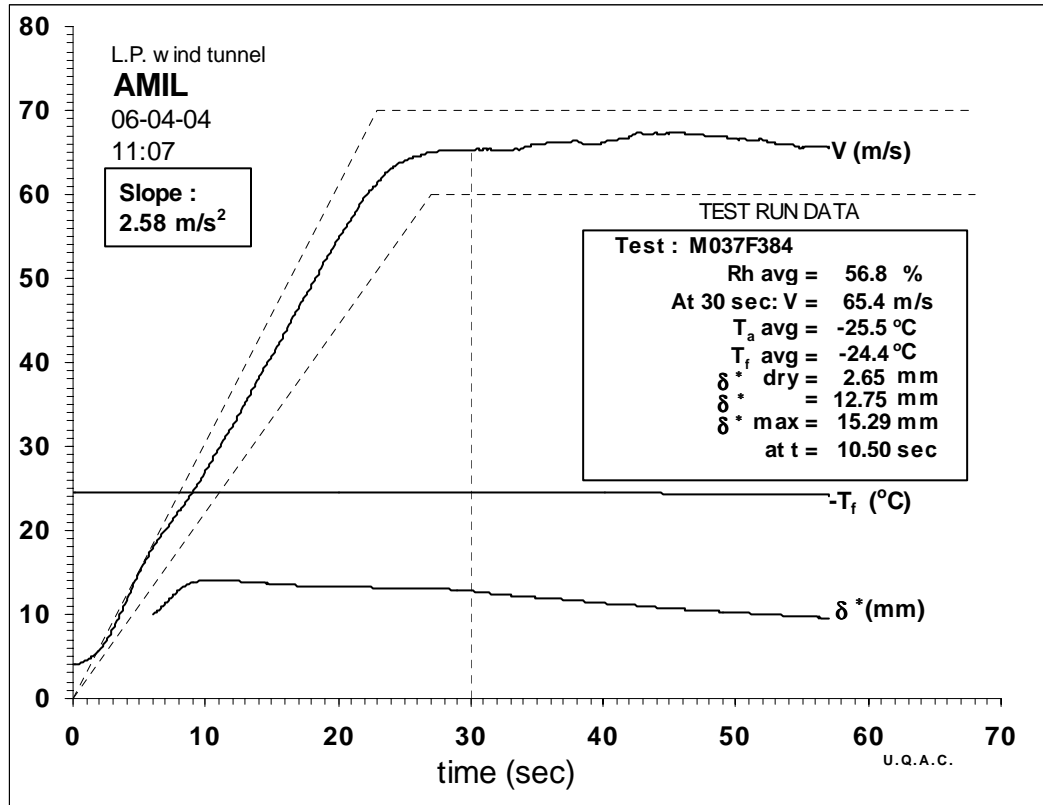

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-25.9	-24.5	56.4	12.14	65.5	2.60	13.00
28	-25.8	-24.5	56.2	11.95	65.0	2.61	13.18
29	-25.8	-24.5	56.1	12.21	65.7	2.59	12.94
30	-25.7	-24.5	56.2	12.11	65.4	2.50	12.74
31	-25.7	-24.5	56.4	11.92	64.9	2.45	12.68
32	-25.7	-24.5	56.2	12.16	65.6	2.43	12.47
33	-25.7	-24.5	56.4	12.21	65.7	2.33	12.10


Averages :

30	-25.8	-24.5	56.3	12.09	65.4	2.51	12.75
----	-------	--------------	------	-------	------	------	--------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

M037F385

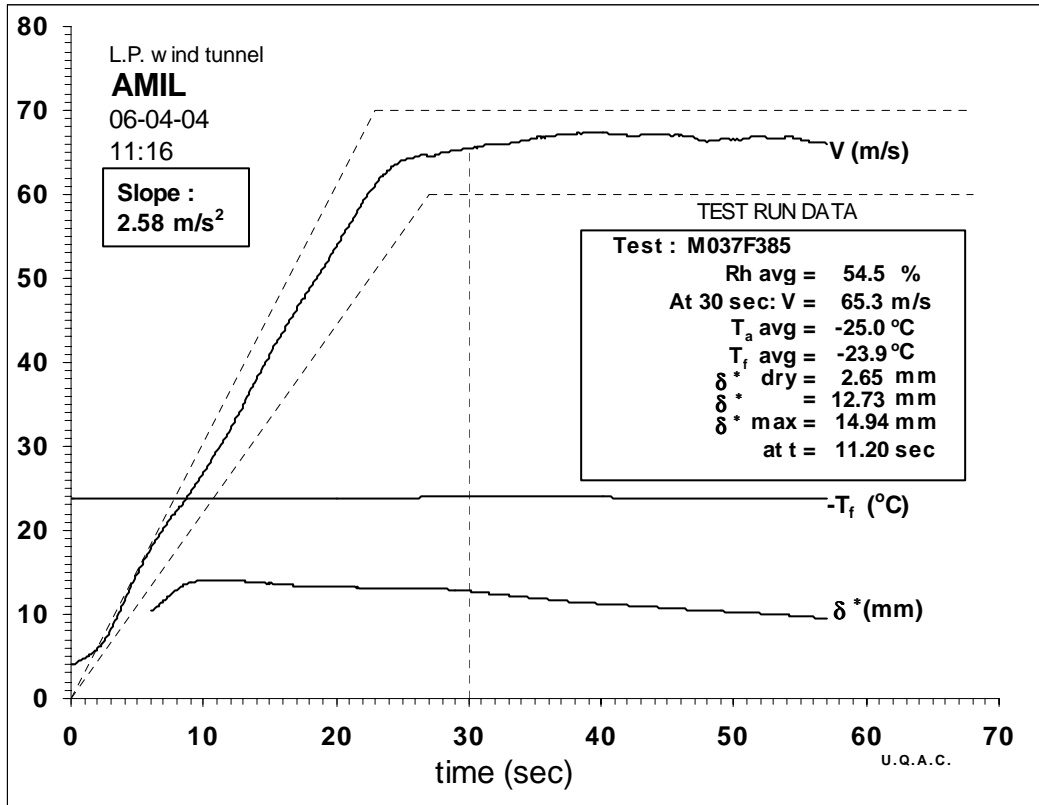

CRITICAL TIME TEST DATA

time Sec	T_a °C	T_f °C	Rh %	P_1-P_2 "H ₂ O	V m/s	P_2-P_3 "H ₂ O	δ^* mm
27	-25.4	-23.9	54.0	11.44	63.6	2.55	13.35
28	-25.4	-24.0	53.9	11.85	64.8	2.52	12.97
29	-25.4	-23.9	53.9	11.78	64.6	2.48	12.86
30	-25.4	-24.0	54.2	12.45	66.4	2.63	12.89
31	-25.3	-23.9	54.1	12.20	65.7	2.47	12.56
32	-25.2	-23.9	54.2	12.23	65.8	2.43	12.41
33	-25.2	-23.9	53.9	12.09	65.4	2.32	12.15


Averages :

30	-25.3	-23.9	54.0	12.05	65.3	2.49	12.73
----	-------	--------------	------	-------	------	------	--------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

M037F386

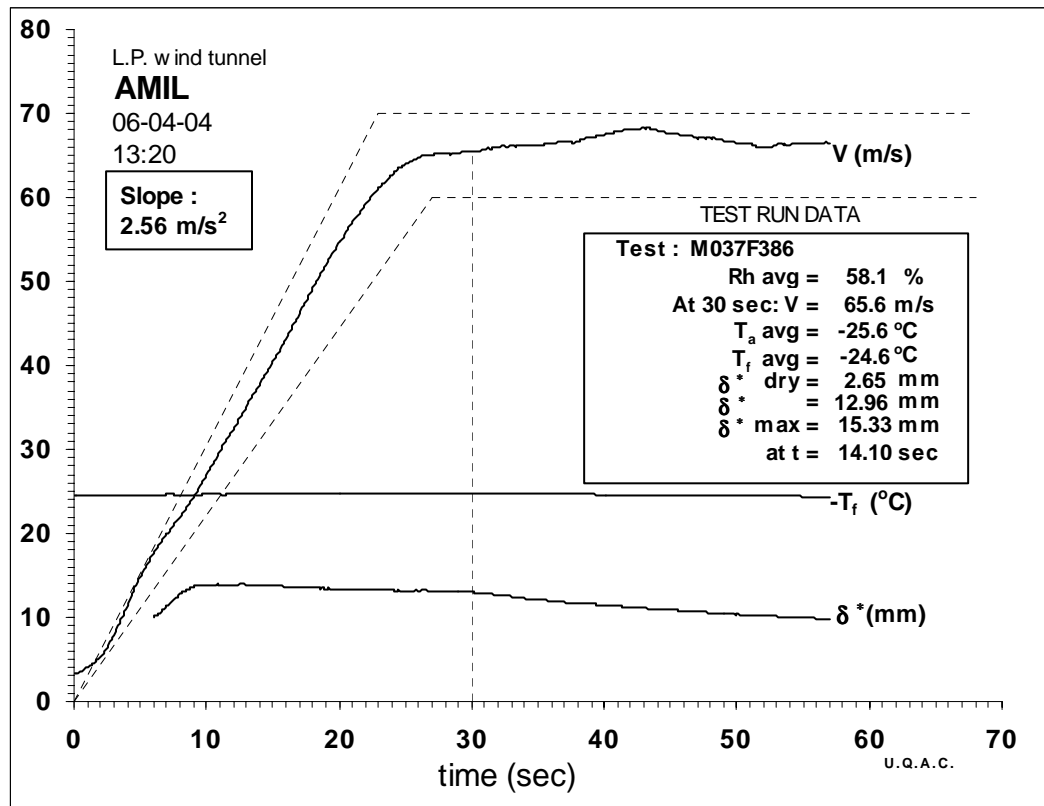

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-25.9	-24.7	57.1	12.22	65.7	2.74	13.40
28	-25.9	-24.8	57.5	12.12	65.4	2.65	13.18
29	-25.9	-24.7	57.2	11.78	64.5	2.58	13.20
30	-25.8	-24.7	57.4	12.00	65.1	2.56	12.98
31	-25.8	-24.7	57.9	12.51	66.5	2.59	12.72
32	-25.7	-24.7	57.5	12.25	65.8	2.56	12.83
33	-25.7	-24.7	57.7	12.42	66.3	2.48	12.45

Averages :

30	-25.8	-24.7	57.5	12.17	65.6	2.59	12.96
----	-------	--------------	------	-------	------	------	--------------

Test Duct Dimensions :


S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

This page left blank.

ARCTON LTD DEICING FLUID

**ARCTICA DG LOT # 55,
FLUID AS RECEIVED G-736**

G736A304

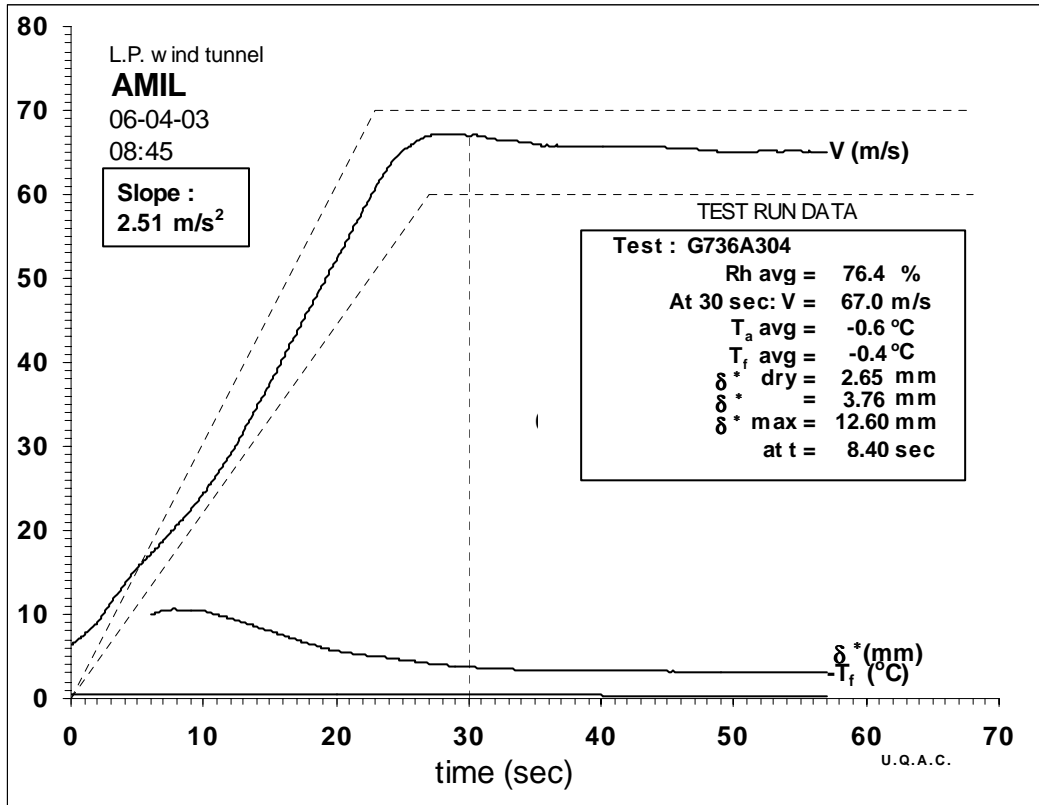

CRITICAL TIME TEST DATA

time Sec	T_a $^\circ\text{C}$	T_f $^\circ\text{C}$	Rh %	P_1-P_2 "H ₂ O	V m/s	P_2-P_3 "H ₂ O	δ^* mm
27	-0.9	-0.4	75.7	11.46	66.8	0.12	4.11
28	-0.8	-0.5	75.7	11.58	67.1	0.08	3.92
29	-0.8	-0.4	75.5	11.89	68.0	0.08	3.92
30	-0.8	-0.4	75.9	11.44	66.7	0.05	3.81
31	-0.8	-0.4	75.9	11.35	66.5	0.01	3.62
32	-0.7	-0.4	76.5	11.51	66.9	-0.01	3.52
33	-0.8	-0.5	76.8	11.50	66.9	-0.01	3.53


Averages :

30	-0.8	-0.4	76.0	11.54	67.0	0.04	3.76
----	------	-------------	------	-------	------	------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

G736A305

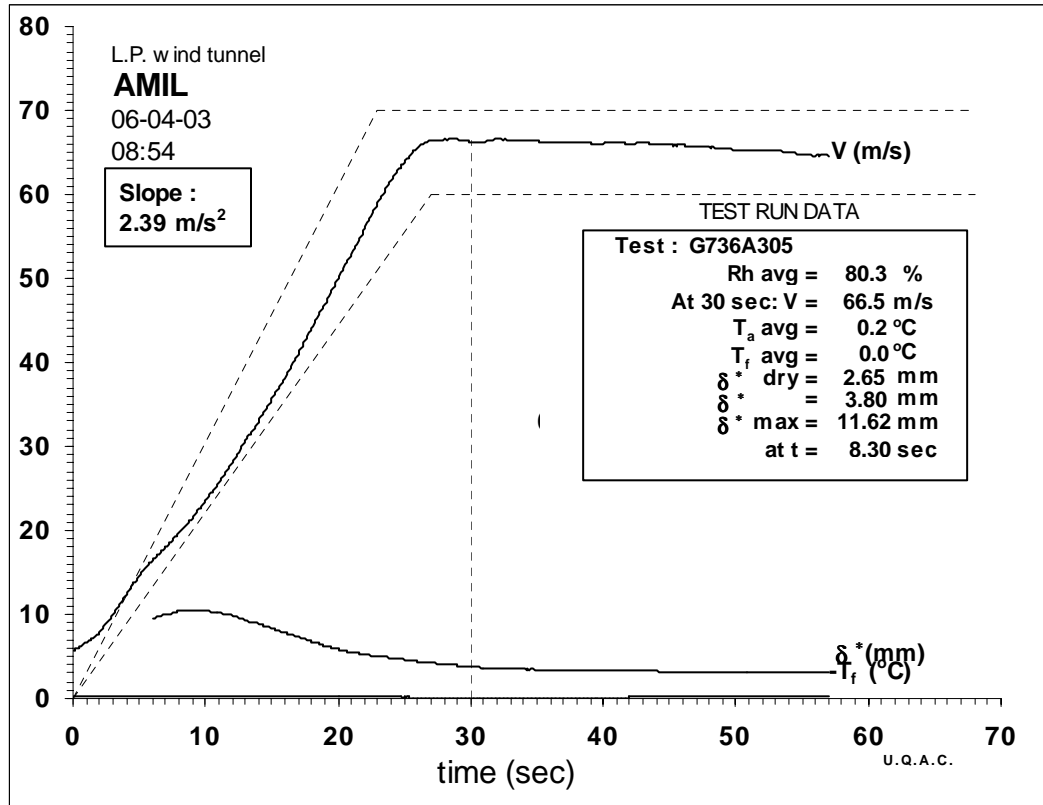

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	0.1	-0.1	80.1	11.49	67.0	0.10	4.02
28	0.0	-0.1	80.1	11.58	67.2	0.12	4.12
29	0.1	0.0	80.1	11.26	66.3	0.07	3.89
30	0.1	-0.1	80.2	11.14	66.0	0.05	3.83
31	0.1	0.0	80.5	11.21	66.2	0.00	3.58
32	0.2	0.0	80.5	11.33	66.5	0.01	3.61
33	0.2	0.0	80.7	11.50	67.0	0.00	3.59


Averages :

30	0.1	0.0	80.3	11.34	66.5	0.05	3.80
----	-----	------------	------	-------	------	------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

G736A306

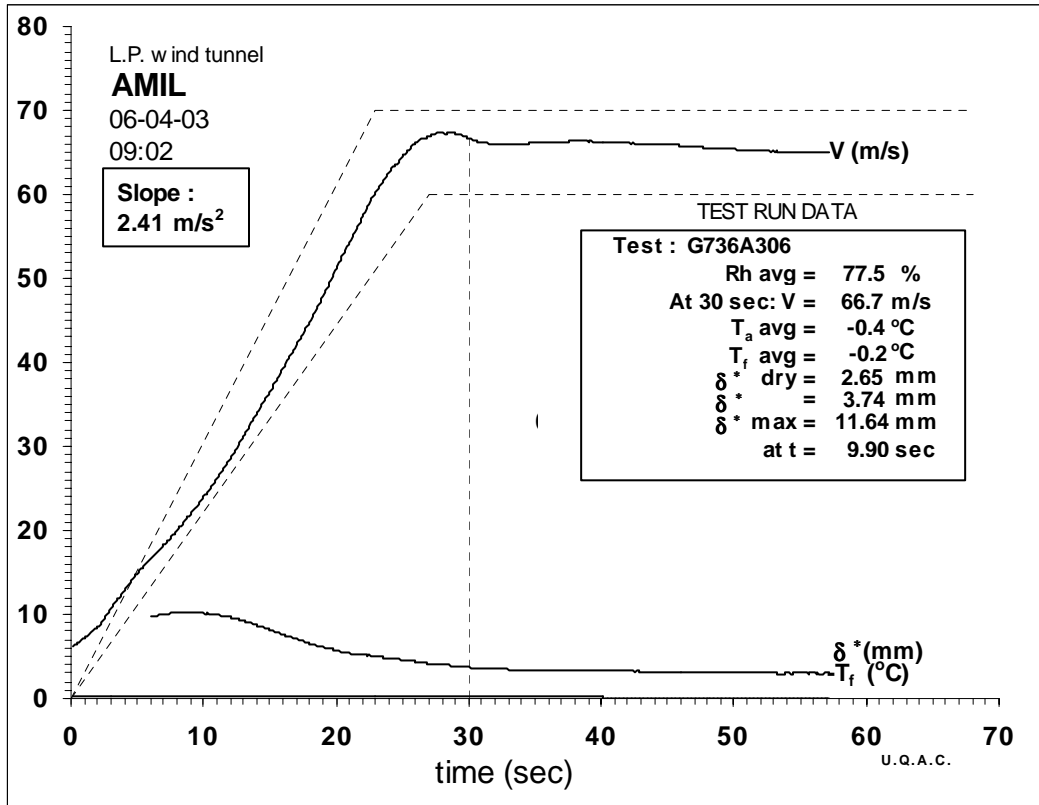

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-0.6	-0.3	76.7	11.73	67.6	0.19	4.38
28	-0.5	-0.2	76.5	11.90	68.1	0.10	4.01
29	-0.6	-0.2	76.9	11.66	67.4	0.05	3.81
30	-0.6	-0.2	77.1	11.42	66.7	0.03	3.72
31	-0.6	-0.2	77.2	11.15	65.9	0.00	3.56
32	-0.6	-0.2	77.2	11.13	65.8	-0.04	3.39
33	-0.6	-0.2	77.4	10.98	65.4	-0.01	3.51


Averages :

30	-0.6	-0.2	77.0	11.43	66.7	0.04	3.74
----	------	-------------	------	-------	------	------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

G736E317

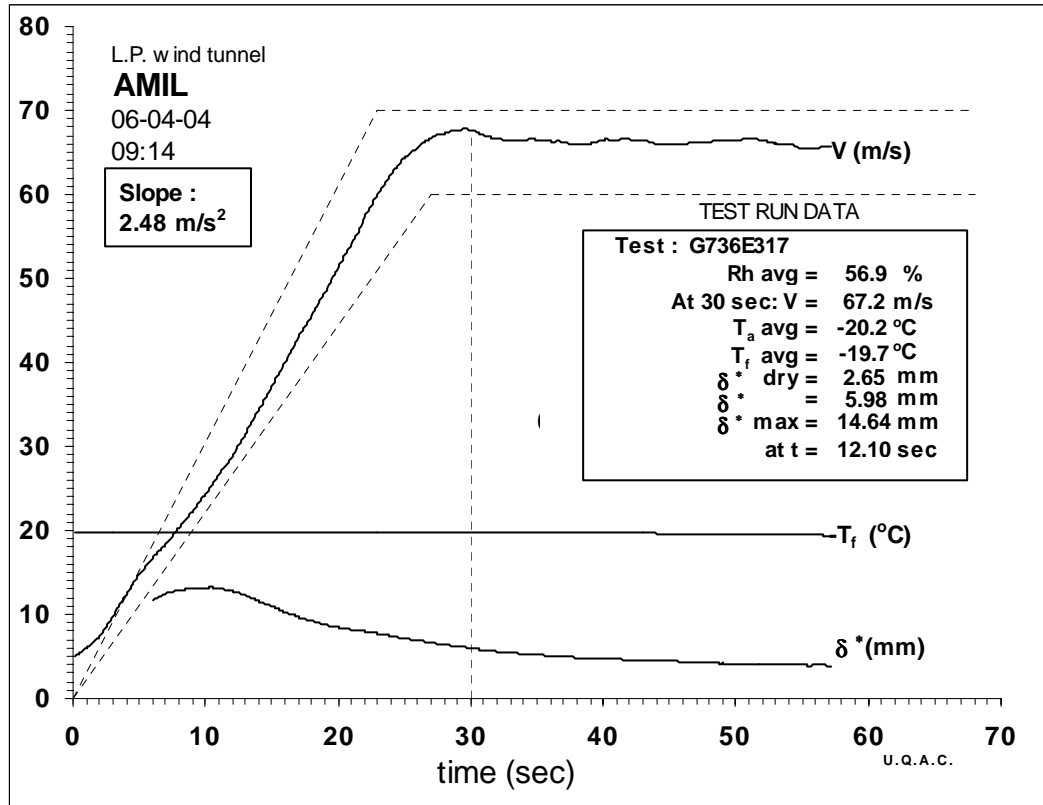

CRITICAL TIME TEST DATA

time Sec	T_a °C	T_f °C	Rh %	P_1-P_2 "H ₂ O	V m/s	P_2-P_3 "H ₂ O	δ^* mm
27	-20.6	-19.8	55.9	11.99	65.8	0.75	6.61
28	-20.5	-19.8	55.9	12.70	67.7	0.76	6.51
29	-20.5	-19.8	56.1	12.89	68.2	0.67	6.14
30	-20.4	-19.8	56.4	12.77	67.9	0.62	5.96
31	-20.4	-19.8	56.1	12.54	67.3	0.55	5.76
32	-20.4	-19.8	56.4	12.14	66.2	0.48	5.54
33	-20.3	-19.8	56.6	12.14	66.2	0.45	5.43


Averages :

30	-20.4	-19.8	56.2	12.51	67.2	0.61	5.98
----	-------	--------------	------	-------	------	------	-------------

Test Duct Dimensions :

$S_2 = 30830.909 \text{ mm}^2$ $S_3 = 33298.898 \text{ mm}^2$ $B_3 = 302.209 \text{ mm}$ $C_3 = 824.788 \text{ mm}$

G736E318

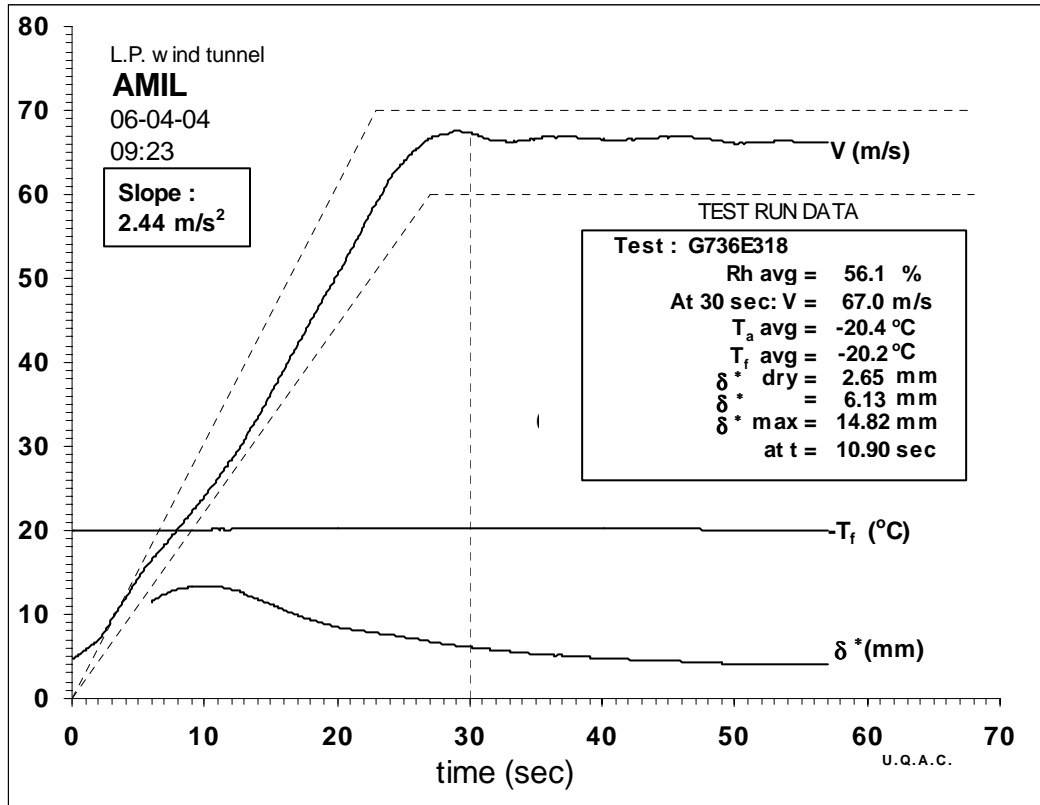

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-20.7	-20.3	55.8	12.17	66.2	0.75	6.57
28	-20.8	-20.3	55.7	12.63	67.5	0.82	6.75
29	-20.8	-20.3	55.6	12.83	68.0	0.66	6.11
30	-20.7	-20.3	55.6	12.73	67.8	0.65	6.07
31	-20.7	-20.3	55.6	12.37	66.8	0.58	5.91
32	-20.6	-20.3	55.6	12.06	66.0	0.57	5.89
33	-20.6	-20.3	55.8	12.11	66.1	0.51	5.67


Averages :

30	-20.7	-20.3	55.7	12.45	67.0	0.65	6.13
----	-------	--------------	------	-------	------	------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

G736E319

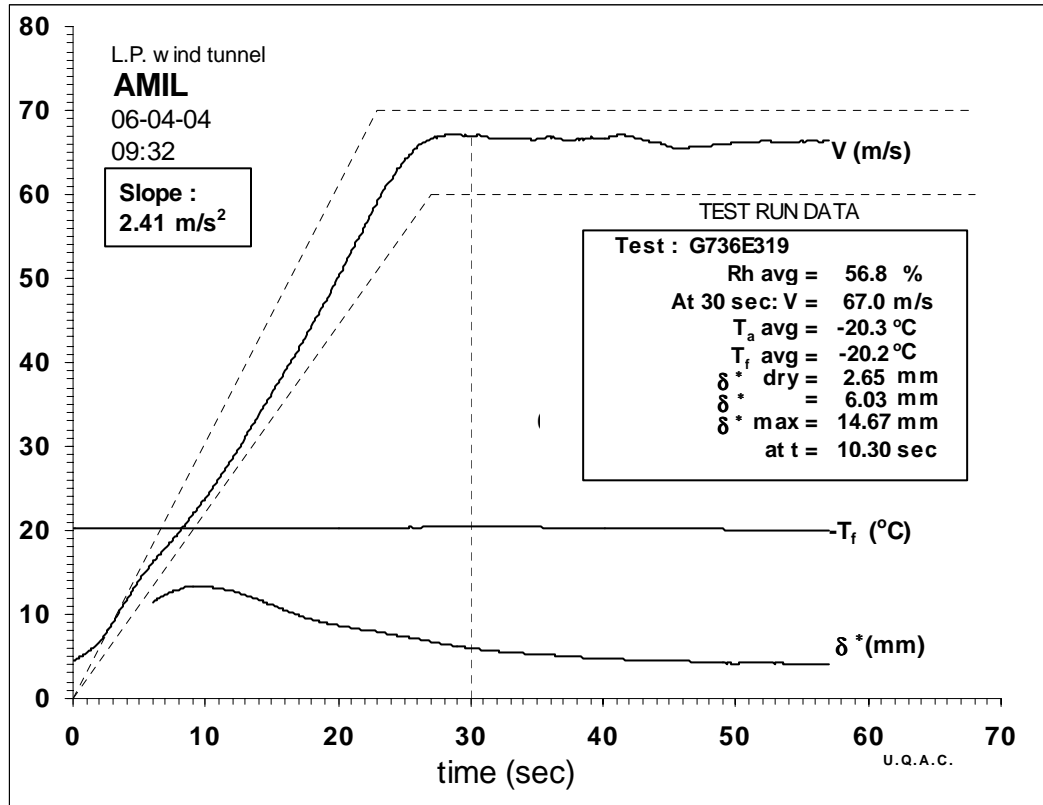

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-20.7	-20.3	56.3	12.79	67.9	0.83	6.73
28	-20.6	-20.4	56.3	12.46	67.0	0.76	6.56
29	-20.7	-20.4	56.2	12.50	67.2	0.66	6.16
30	-20.6	-20.4	56.6	12.38	66.8	0.58	5.89
31	-20.6	-20.4	56.3	12.41	66.9	0.55	5.76
32	-20.5	-20.4	56.5	12.52	67.2	0.56	5.78
33	-20.5	-20.4	56.4	12.07	66.0	0.44	5.40


Averages :

30	-20.6	-20.4	56.4	12.44	67.0	0.62	6.03
----	-------	--------------	------	-------	------	------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

G736H326

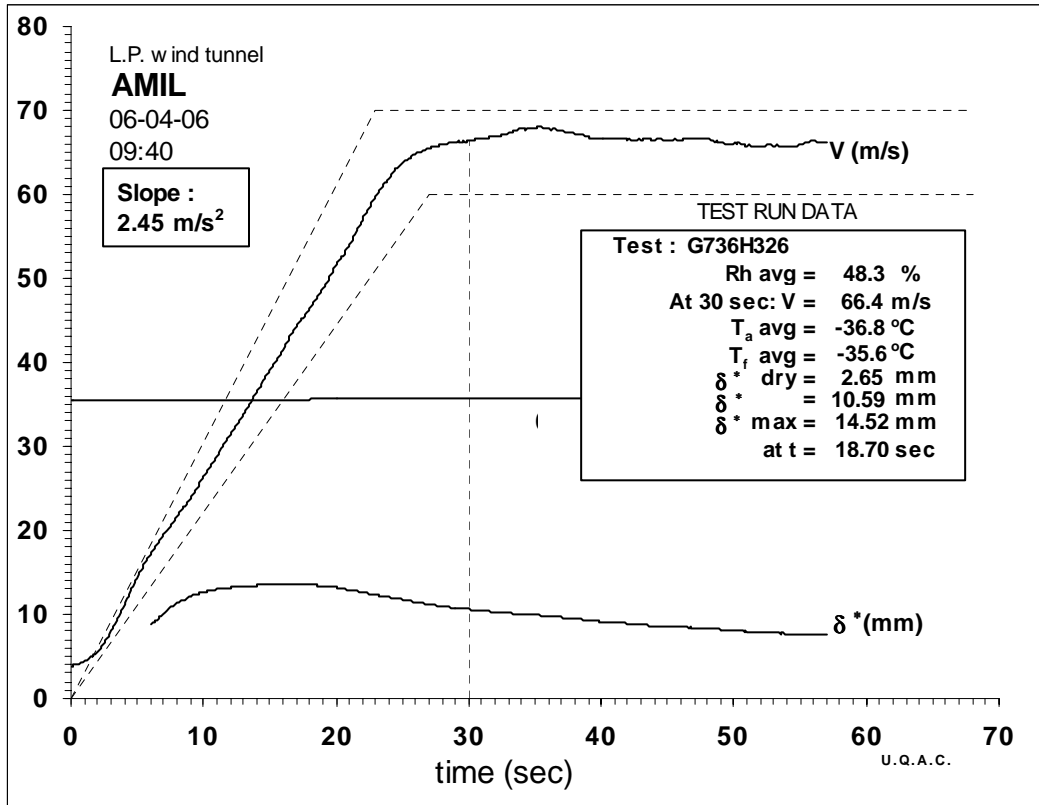

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-37.2	-35.7	48.2	12.68	65.4	2.07	10.99
28	-37.2	-35.7	48.2	12.93	66.0	2.11	11.01
29	-37.2	-35.7	48.0	13.14	66.6	2.04	10.66
30	-37.2	-35.8	48.3	13.04	66.3	2.02	10.65
31	-37.1	-35.7	48.1	13.07	66.4	1.91	10.30
32	-37.1	-35.7	48.0	13.29	66.9	1.96	10.37
33	-37.1	-35.7	48.3	13.26	66.9	1.89	10.15


Averages :

30	-37.2	-35.7	48.1	13.08	66.4	2.00	10.59
----	-------	--------------	------	-------	------	------	--------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

G736H327

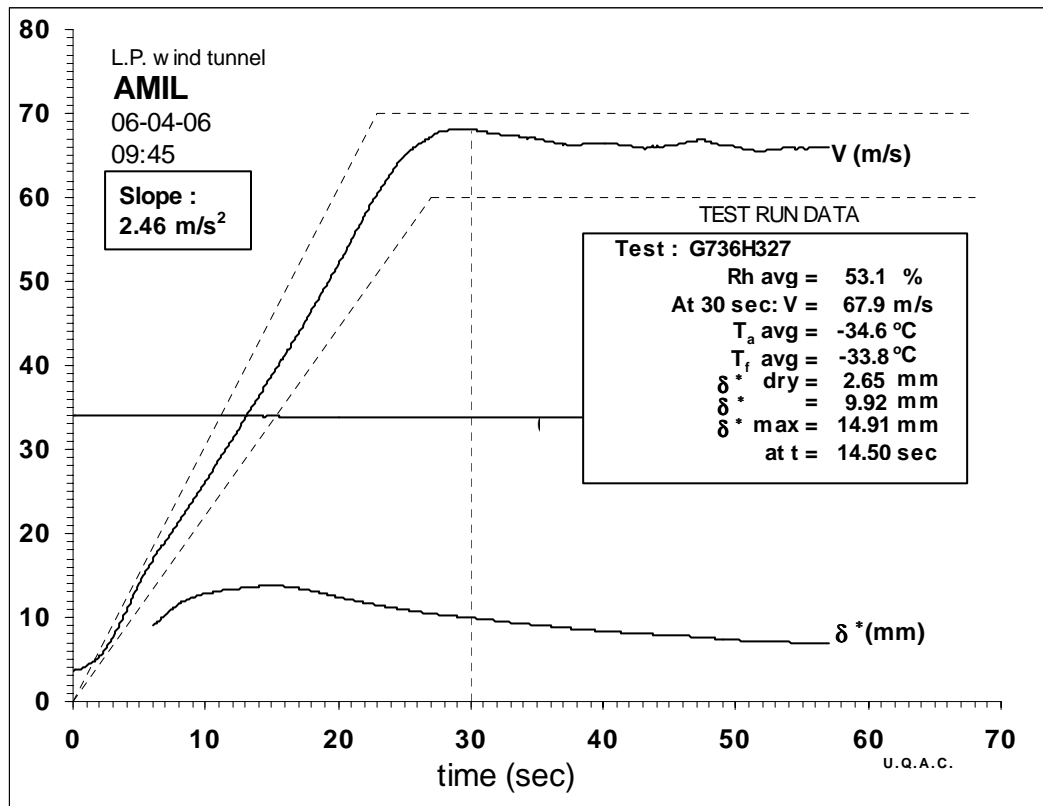

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-35.0	-33.9	52.5	13.51	67.8	1.93	10.16
28	-34.9	-33.8	53.0	13.60	68.0	1.95	10.21
29	-34.9	-33.8	53.0	13.78	68.5	1.99	10.23
30	-34.9	-33.9	53.3	13.54	67.9	1.90	10.05
31	-34.8	-33.9	52.9	13.52	67.9	1.82	9.81
32	-34.7	-33.9	53.0	13.37	67.5	1.68	9.46
33	-34.7	-33.9	52.9	13.29	67.3	1.66	9.41


Averages :

30	-34.8	-33.9	53.0	13.53	67.9	1.85	9.92
----	-------	--------------	------	-------	------	------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

G736H328

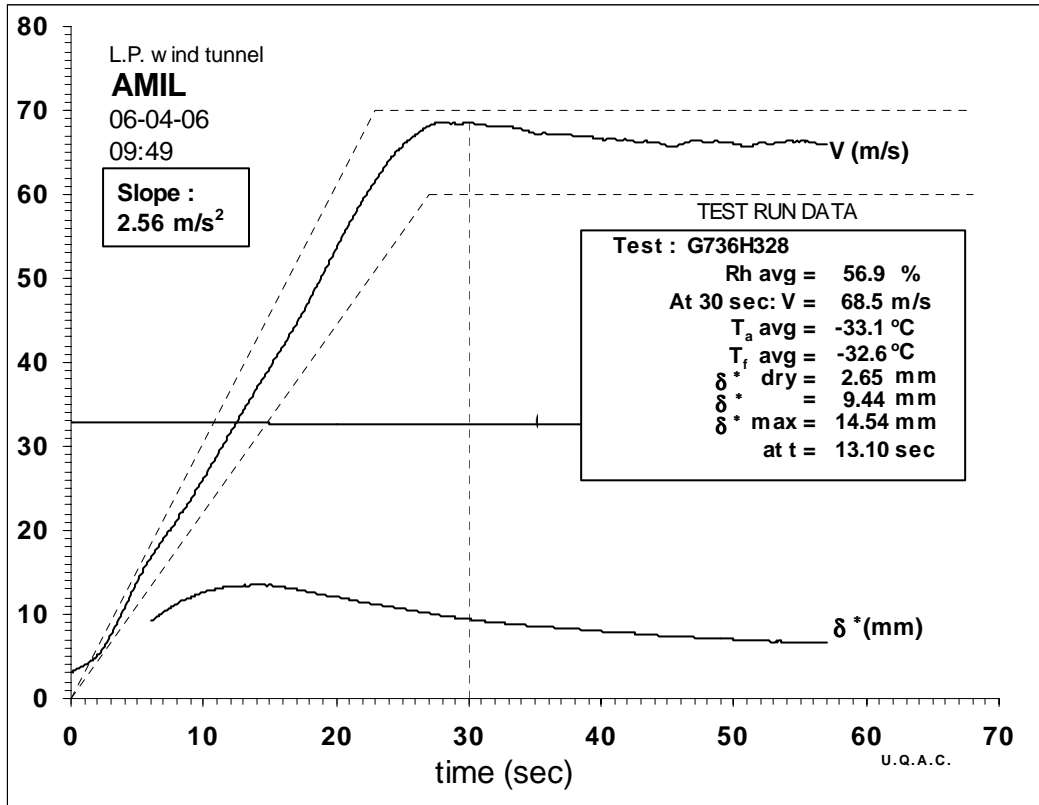

CRITICAL TIME TEST DATA

time Sec	T_a °C	T_f °C	Rh %	P_1-P_2 "H ₂ O	V m/s	P_2-P_3 "H ₂ O	δ^* mm
27	-33.4	-32.6	56.9	13.64	68.4	1.87	9.93
28	-33.4	-32.6	56.8	13.80	68.7	1.87	9.87
29	-33.4	-32.6	57.1	13.89	69.0	1.81	9.65
30	-33.4	-32.6	56.7	13.65	68.4	1.69	9.35
31	-33.3	-32.6	56.7	13.34	67.6	1.59	9.18
32	-33.3	-32.6	56.7	13.68	68.5	1.62	9.13
33	-33.2	-32.6	56.7	13.86	68.9	1.61	9.05


Averages :

30	-33.4	-32.6	56.8	13.69	68.5	1.72	9.44
----	-------	--------------	------	-------	------	------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

G736H329

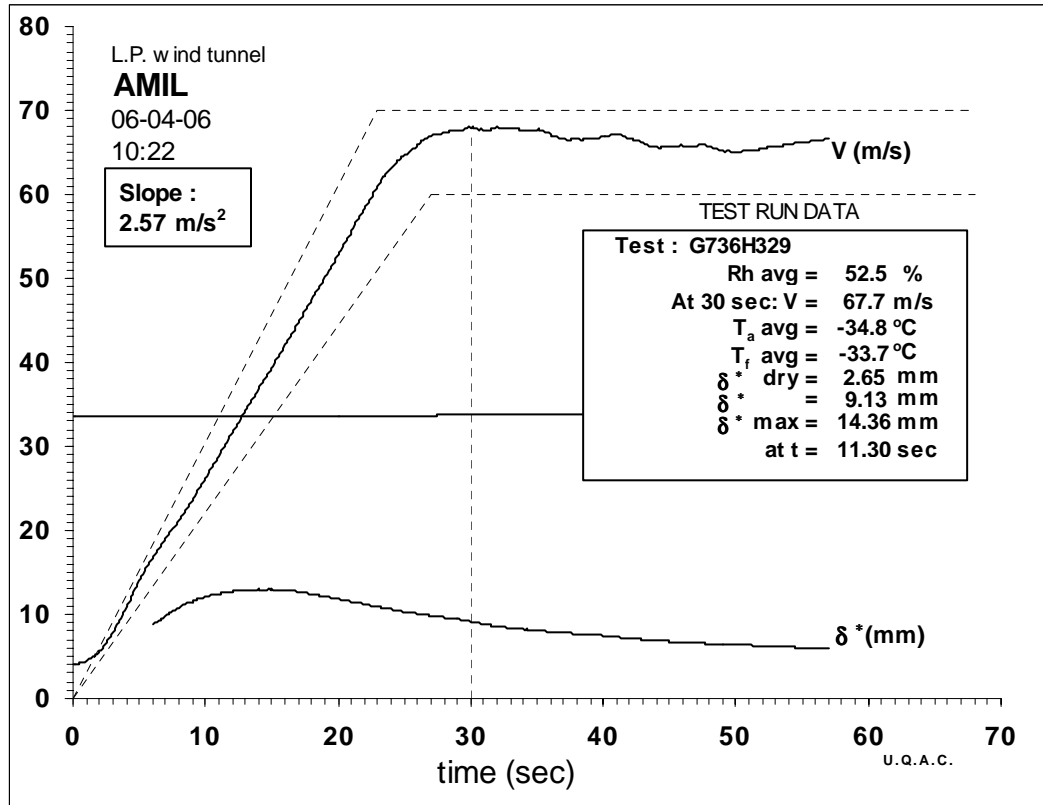

CRITICAL TIME TEST DATA

time Sec	T_a °C	T_f °C	Rh %	P_1-P_2 "H ₂ O	V m/s	P_2-P_3 "H ₂ O	δ^* mm
27	-35.2	-33.7	52.5	13.37	67.4	1.84	9.97
28	-35.2	-33.7	52.3	13.52	67.8	1.77	9.64
29	-35.1	-33.7	52.4	13.54	67.9	1.73	9.52
30	-35.1	-33.7	52.4	13.37	67.4	1.62	9.27
31	-35.1	-33.7	52.2	13.45	67.6	1.51	8.87
32	-35.1	-33.8	52.3	13.66	68.2	1.41	8.45
33	-35.0	-33.7	52.3	13.25	67.1	1.30	8.24


Averages :

30	-35.1	-33.7	52.3	13.47	67.7	1.60	9.13
----	-------	--------------	------	-------	------	------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

G736H330

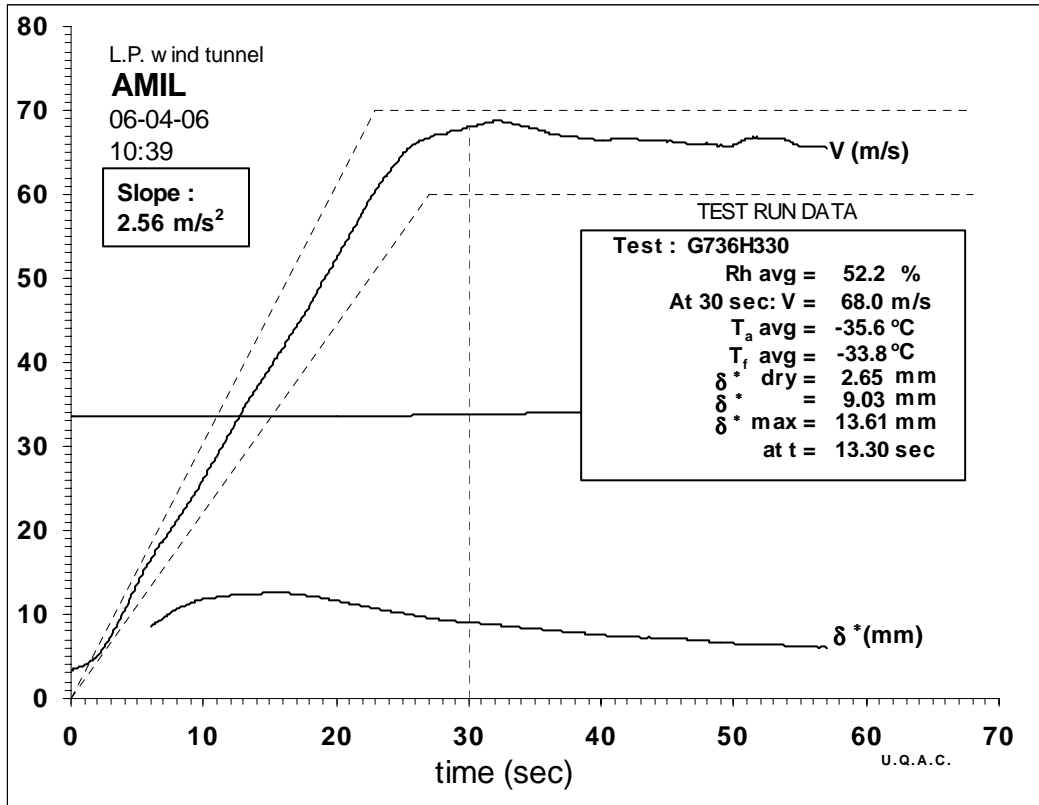

CRITICAL TIME TEST DATA

time Sec	T _a °C	T _f °C	Rh %	P ₁ -P ₂ "H ₂ O	V m/s	P ₂ -P ₃ "H ₂ O	δ* mm
27	-36.0	-33.7	52.5	13.54	67.8	1.74	9.55
28	-36.0	-33.8	52.1	13.23	67.0	1.60	9.24
29	-35.9	-33.8	51.9	13.27	67.1	1.59	9.19
30	-35.9	-33.8	52.2	13.47	67.5	1.57	9.06
31	-35.9	-33.9	51.9	14.18	69.3	1.63	8.97
32	-35.9	-33.9	52.1	13.84	68.5	1.50	8.70
33	-35.8	-33.9	52.1	13.96	68.8	1.47	8.57

Averages :

30	-35.9	-33.8	52.1	13.63	68.0	1.58	9.03
----	-------	--------------	------	-------	------	------	-------------

Test Duct Dimensions :

S2 = 30830.909 mm² S3 = 33298.898 mm² B3 = 302.209 mm C3 = 824.788 mm

ACCREDITATION

This page left blank.

THIS IS TO CERTIFY THAT

Anti-Icing Materials International Laboratory (AMIL) OF

Université du Québec à Chicoutimi
Département des Sciences Appliquées
555, Boulevard de l'Université
Chicoutimi Québec, Canada G7H 2B1.

HAS HAD ITS FACILITIES EXAMINED AND APPROVED THROUGH CONTINUING
AUDIT PROCEDURES AS ESTABLISHED BY THE COMMERCIAL AVIATION
ACCREDITATION CONFORMANCE TO THE APPLICABLE SPECIFICATION
REQUIREMENTS FOR THE "AIRCRAFT GROUND DEICING/ANTI-ICING
AERODYNAMIC ACCEPTANCE TEST FACILITIES", IN ACCORDANCE WITH PRI
PROGRAM DOCUMENT AC3001, "AUDIT CRITERIA FOR COMPLIANCE TO SAE AMS
1424 AND AMS 1428".

THIS CERTIFICATE IS GRANTED BY AUTHORITY OF THE PERFORMANCE REVIEW
INSTITUTE AND EXPIRES ON

October 31, 2007

Signed for the Performance Review Institute:



WILLIAM G. WAGNER
MANAGING DIRECTOR

CERTIFICATE NO. 0001 - A
ISSUED OCTOBER 25, 2002

98-1302

